


READY

THE INNOVATOR OF OUR INDUSTRY®

SELECTIVE FIT™ Die Sets and Guiding





Full Service and Full Range

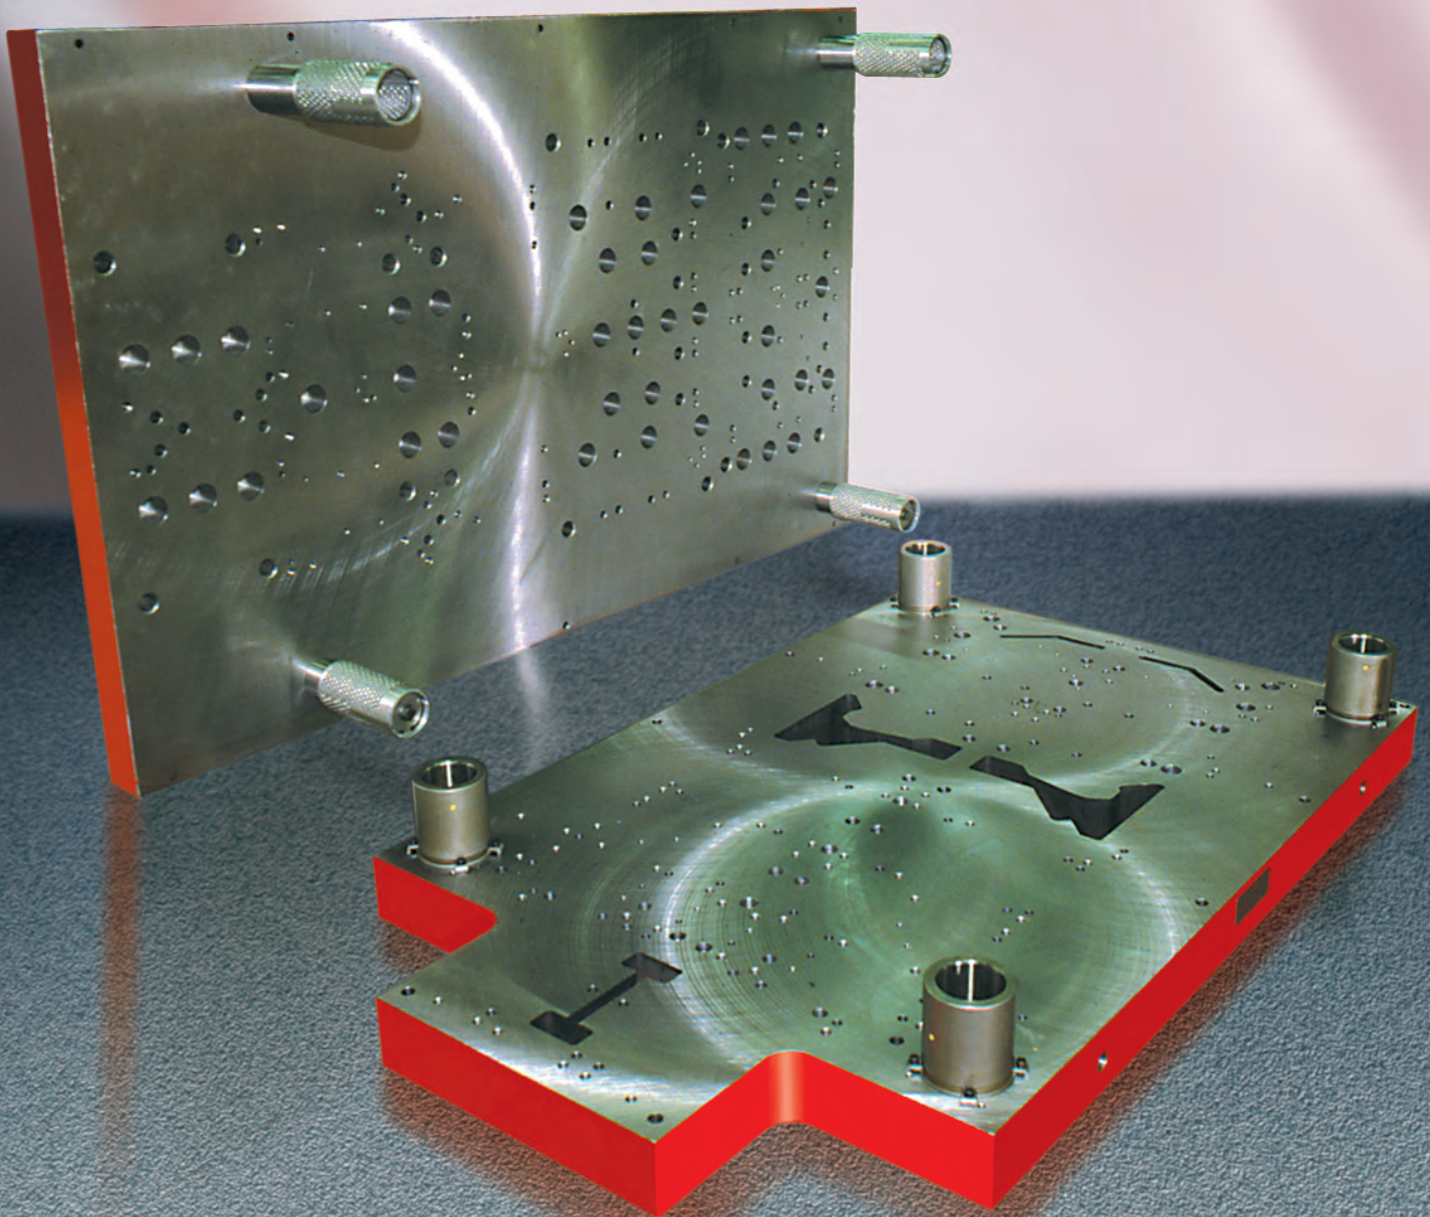

Protected by U.S. and International Patents

Die Sets - We offer a complete service

- "Next Day Die Set" - stock rectangular. "Order today, we'll ship tomorrow."
- Special Die Sets, both plain and ball bearing, and 3 Plate Die Sets.
- Aluminum Die Sets
- Blanchard Ground Plates, Special Machining, and Parallels.

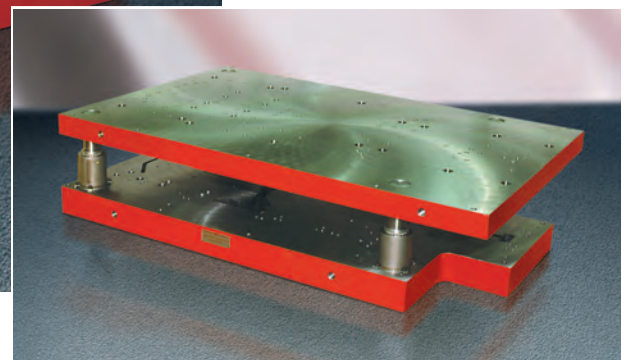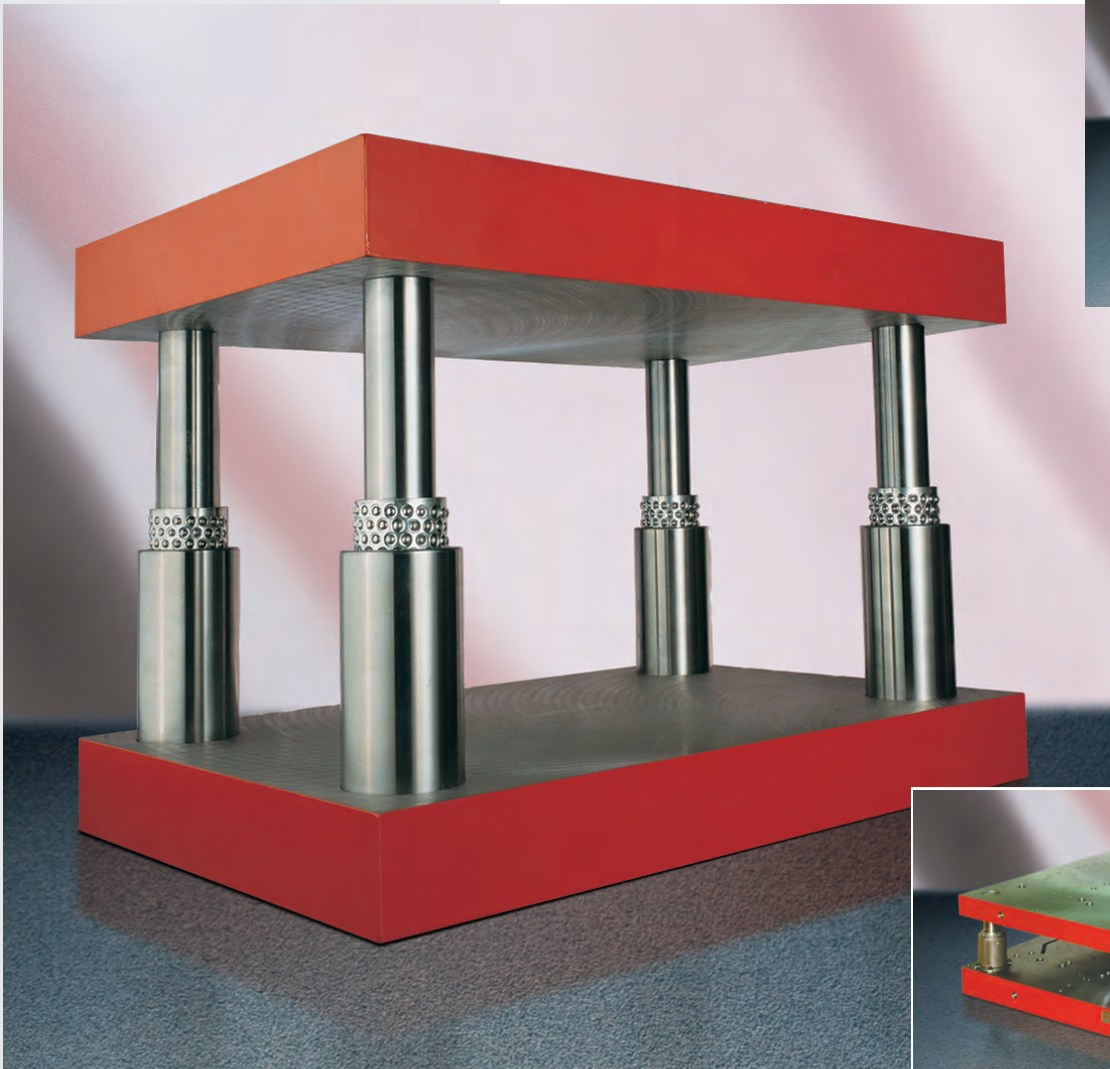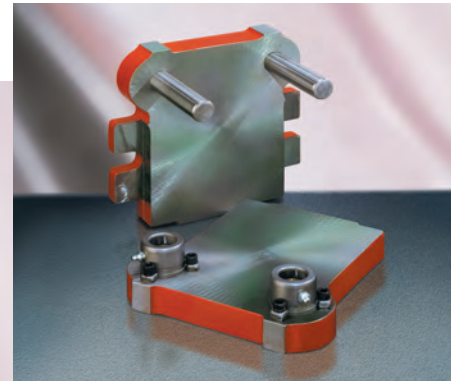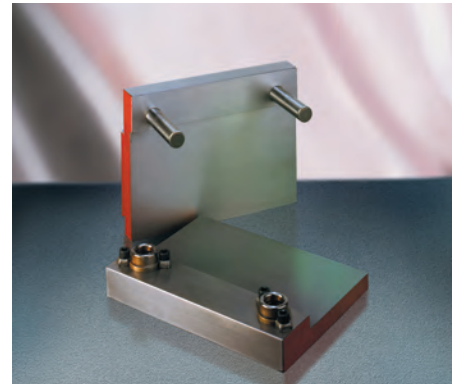

Guide Pins and Bushings - We offer the full range, inch & metric



- Our Plain Bearing line offers you three types of guide pins (straight, demountable and double diameter) and two kinds of bushings (demountable steel and our unique, patented Sintered Bronze Bushing.) All of these components are color-coded for Selective Fit™ and are fully interchangeable with one another.
- Our Ball Bearing line employs the same three guide pins plus two styles of ball bushings (straight sleeve and demountable). Unlike our competitors, our design is interchangeable with all major ball bearing brands on the market. Finally, you have at your disposal a “one size fits all” ball bearing line.
- We manufacture and stock the world’s largest inventory of Danly style metric guiding. Why? Because in North America we are READY Technology, outside North America we are Danly International*, and we manufacture and sell Danly die sets and guiding through our ten plants and offices in Europe and in the Far East. Now we’re making our extensive line of metric components available to our U.S. customers.

***Make no mistake:** Neither Ready Technology or Danly International or any of the Danly companies outside North America is affiliated in any way with Danly Die Set or Connell Limited Partnership

DIE SETS

Standard, Two Post Plain Bearing Die Sets.....	4
Custom, Two Post All Steel Die Sets	5
Custom, Four Post All Steel Die Sets.....	6
Custom, Two Post Ball Bearing Die Sets	7
Custom, Four Post Ball Bearing Die Sets	8
Ground Plate Specs	9
Aluminum Die Sets	10

INCH Plain Bearing Components..... 11

INCH Ball Bearing Components 18

METRIC Plain Bearing Components 28


METRIC Ball Bearing Components 32

Standard, Two Post Plain Bearing Die Sets


- Standard, in-stock die sets are manufactured with our precision guide pins and standard shoulder bushings.
- Bushing clamp position is for left-to-right feed.
- Please specify pin length (L), quantity needed and catalog number with your order. Unless otherwise specified, standard shoulder length bushings will be supplied.

Order Example

Qty Catalog No. Pin Length
1 2S1006-11 L = 6

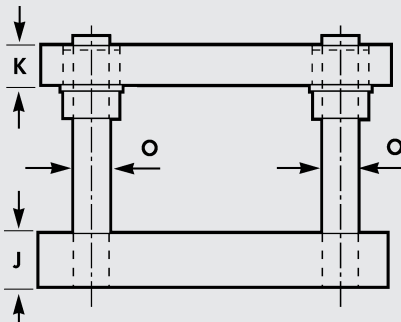

side view

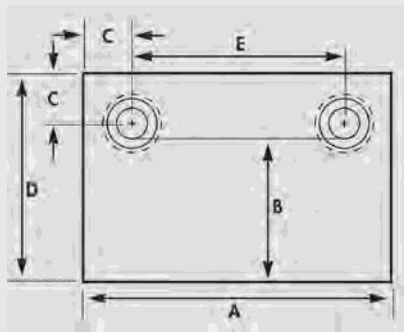



top view

In-stock, 2 Post Plain Bearing Die Sets



Die Space L to R A F to B B		Thickness Die Holder Punch Holder J K		O	D	E	C	Catalog Number
6"	4"	1	1	1	6	3	1 1/2	2S64-11
6"	6"	1 1/4	1 1/4	1	8	3	1 1/2	2S66-11
8"	6"	1 1/4	1 1/4	1	8	5	1 1/2	2S86-11
8"	6"	1 1/4	1 1/2	1	8	5	1 1/2	2S86-12
8"	6"	1 1/2	1 1/4	1	8	5	1 1/2	2S86-21
8"	6"	1 1/2	1 1/2	1	8	5	1 1/2	2S86-22
10"	6"	1 1/4	1 1/4	1	8	7	1 1/2	2S1006-11
10"	6"	1 1/4	1 1/2	1	8	7	1 1/2	2S1006-12
10"	6"	1 1/2	1 1/4	1	8	7	1 1/2	2S1006-21
10"	6"	1 1/2	1 1/2	1	8	7	1 1/2	2S1006-22
10"	10"	1 1/2	1 1/2	1 1/4	12 1/4	6 3/4	1 5/8	2S1010-11
10"	10"	1 1/2	2	1 1/4	12 1/4	6 3/4	1 5/8	2S1010-12
10"	10"	2	1 1/2	1 1/4	12 1/4	6 3/4	1 5/8	2S1010-21
10"	10"	2	2	1 1/4	12 1/4	6 3/4	1 5/8	2S1010-22
12"	6"	1 1/2	1 1/2	1 1/4	8 1/4	8 3/4	1 5/8	2S1206-11
12"	6"	1 1/2	2	1 1/4	8 1/4	8 3/4	1 5/8	2S1206-12
12"	6"	2	1 1/2	1 1/4	8 1/4	8 3/4	1 5/8	2S1206-21
12"	6"	2	2	1 1/4	8 1/4	8 3/4	1 5/8	2S1206-22
14"	6"	1 1/2	1 1/2	1 1/2	8 1/2	10 1/2	1 3/4	2S1406-11
14"	6"	1 1/2	2	1 1/2	8 1/2	10 1/2	1 3/4	2S1406-12
14"	6"	2	1 1/2	1 1/2	8 1/2	10 1/2	1 3/4	2S1406-21
14"	6"	2	2	1 1/2	8 1/2	10 1/2	1 3/4	2S1406-22
14"	10"	1 1/2	1 1/2	1 1/2	12 1/2	10 1/2	1 3/4	2S1410-11
14"	10"	1 1/2	2	1 1/2	12 1/2	10 1/2	1 3/4	2S1410-12
14"	10"	2	1 1/2	1 1/2	12 1/2	10 1/2	1 3/4	2S1410-21
14"	10"	2	2	1 1/2	12 1/2	10 1/2	1 3/4	2S1410-22
16"	10"	1 1/2	1 1/2	1 1/2	12 1/2	12 1/2	1 3/4	2S1610-11
16"	10"	1 1/2	2	1 1/2	12 1/2	12 1/2	1 3/4	2S1610-12
16"	10"	2	1 1/2	1 1/2	12 1/2	12 1/2	1 3/4	2S1610-21
16"	10"	2	2	1 1/2	12 1/2	12 1/2	1 3/4	2S1610-22
18"	8"	1 1/2	1 1/2	1 1/2	10 1/2	14 1/2	1 3/4	2S1808-11
18"	8"	1 1/2	2	1 1/2	10 1/2	14 1/2	1 3/4	2S1808-12
18"	8"	2	1 1/2	1 1/2	10 1/2	14 1/2	1 3/4	2S1808-21
18"	8"	2	2	1 1/2	10 1/2	14 1/2	1 3/4	2S1808-22
20"	12"	1 1/2	1 1/2	1 1/2	14 1/2	16 1/2	1 3/4	2S2012-11
20"	12"	1 1/2	2	1 1/2	14 1/2	16 1/2	1 3/4	2S2012-12
20"	12"	2	1 1/2	1 1/2	14 1/2	16 1/2	1 3/4	2S2012-21
20"	12"	2	2	1 1/2	14 1/2	16 1/2	1 3/4	2S2012-22

Custom, Two Post All Steel Die Sets

Back Post - Type 2B

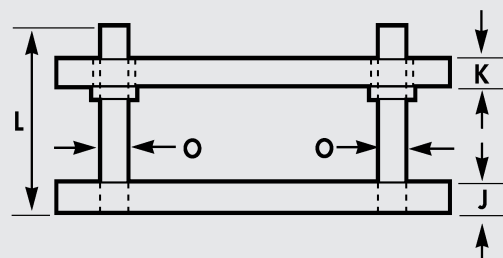
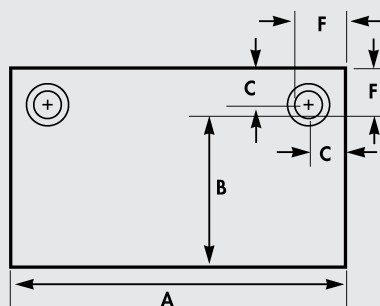


Diagonal Post - Type 2D

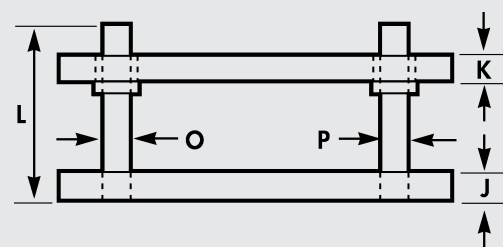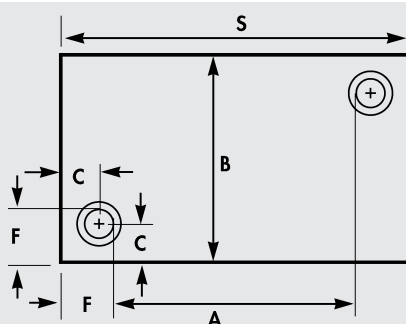

Can be made with posts on other diagonal, if specified.
Center of die space is in the center of the die plates.

Center Post - Type 2C

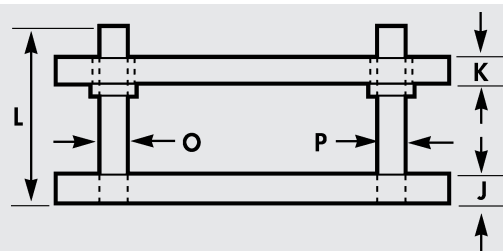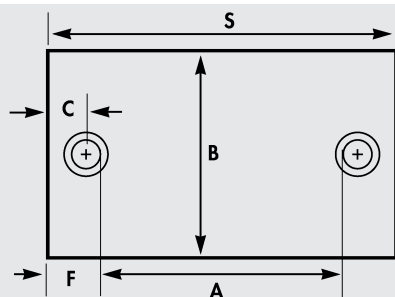

Center of die space is in the center of the die plates.

When ordering custom, all steel die sets, specify:

1. Type 2B, 2D, or 2C. Note: O & P should be different diameters on Type 2D & 2C die sets.
2. Dimensions A, B, J, K, and L.
3. Type bushings - sintered bronze bushings supplied unless otherwise specified.
4. Diameter of threaded shank, if wanted. See page 9 for Threaded Shank Selection Chart.
5. How shipment should be made.
6. Custom die sets may not be returned for credit.
7. Quantity needed.




Two Post Die Sets

Dimensions furnished when customer specifies only A and B dimensions. B dimension does not affect table.

Die Space L to R A	Post Diameter O	Post Diameter P	D.H. Thickness J	P.H. Thickness K	F for O Post	C for O Post	C for P Post	S
6" to 8"	1	--	1 1/4	1 1/4	2	1 1/2	--	--
9" to 12"	1 1/4	1	1 1/2	1 1/2	2 1/4	1 5/8	1 3/4	A + 4 1/2
13" to 16"	1 1/2	1 1/4	1 1/2	1 1/2	2 1/2	1 3/4	1 7/8	A + 5
17" to 22"	1 3/4	1 1/2	1 3/4	1 3/4	2 3/4	1 7/8	2	A + 5 1/2
23" to 28"	2	1 3/4	2	2	3	2	2 1/8	A + 6
29" to 40"	2	1 3/4	2 1/2	2 1/2	3	2	2 1/8	A + 6
41" to 65"	2 1/2	2	3	3	3 3/4	2 1/2	2 3/4	A + 7 1/2

Custom, Four Post All Steel Die Sets

Four Post - Type 4P

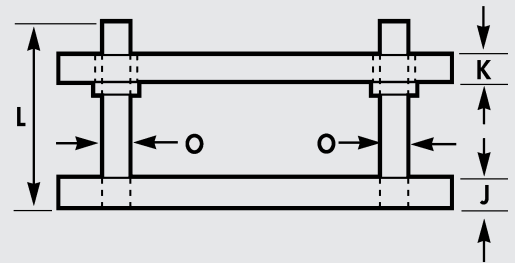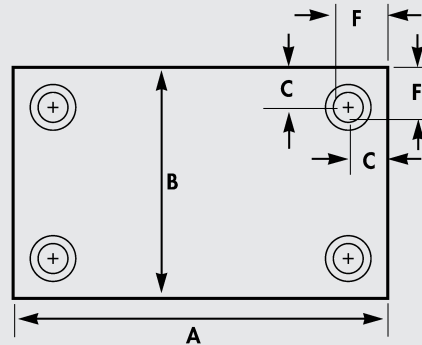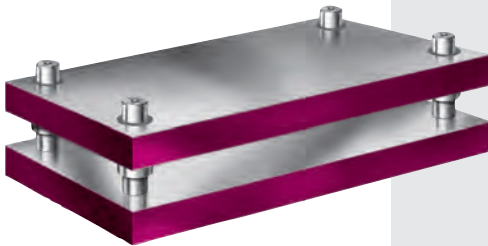

Right front pin offset 1/8".

When ordering custom, all steel die sets, specify:

1. This table shows accepted design dimensions. Any or all of these dimensions, however, can be changed to conform to customer's specifications of A, B, O, P, J, K, L, F or W, etc.
2. All die sets are always made so that the punch holder can not be reversed on die holder. Type 4Ps are made with same diameter posts, but the right front post is offset 1/8" toward outside edge of die set.
3. Any of these sets are available both with or without shank. Unless otherwise specified, shank is always located in middle of both A and B dimensions. For safety reasons, we supply only threaded shanks. See page 9 for Threaded Shank Selection Chart.
4. Die sets of design other than shown in catalog can be furnished in steel or aluminum.
5. Custom die sets may not be returned for credit.
6. Sintered Bronze Bushings supplied unless otherwise specified.

Four Post Die Sets

Dimensions furnished when customer specifies only A and B dimensions.

Die Space L to R A	Post Diameter O	D.H. Thickness J	P.H. Thickness K
6" to 10"	1	1 1/4	1 1/4
11" to 16"	1 1/4	1 1/2	1 1/2
17" to 22"	1 1/2	1 3/4	1 3/4
23" to 28"	1 3/4	2	2
29" to 40"	2	2 1/2	2 1/2
41" to 65"	2 1/2	3	3

These dimensions apply to both two post and four post sets.



Nominal Guide Post Diameter	C	F
1"	1 1/2	2
1 1/4"	1 5/8	2 1/4
1 1/2"	1 3/4	2 1/2
1 3/4"	1 7/8	2 3/4
2"	2	3
2 1/2"	2 1/2	3 3/4
3"	2 3/4	4 1/4

Let Us Quote Your Special Applications



- Aluminum die sets.
- Three and four platen die sets.
- Plate work, ground or unground.
- Stress relieved plates.
- Die sets can be made with heel blocks.
- Per print CNC machining, holes, keyways, cutouts and burnouts.

Custom, Two Post Ball Bearing Die Sets

Back Post - Type 2BB

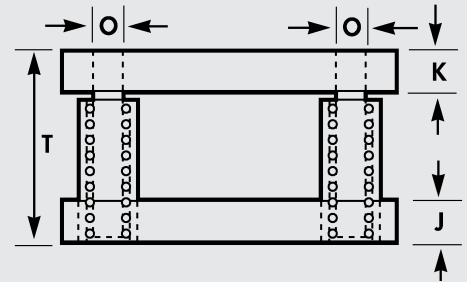
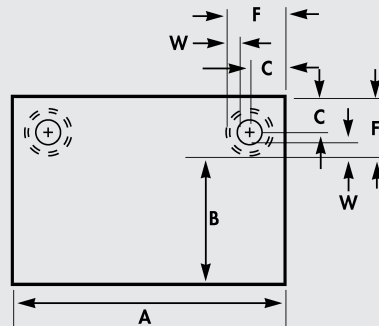


Diagonal Post - Type 2BD

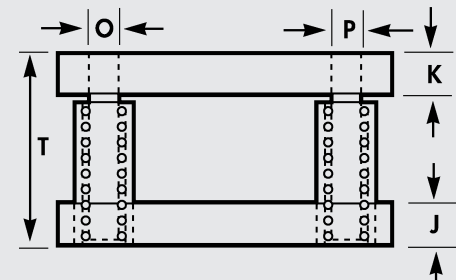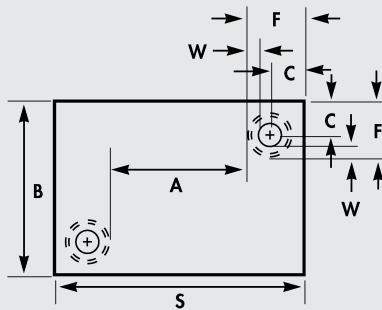

Center of die space is in the center of the die plates.

Center Post - Type 2BC

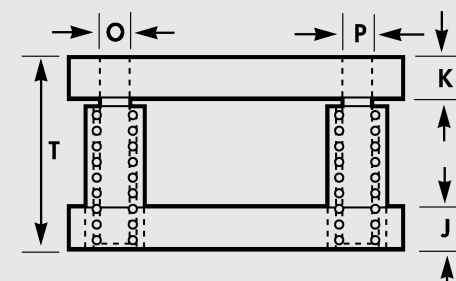

Center of die space is in the center of the die plates.

When ordering custom ball bearing die sets, specify:


1. Type 2BB, 2BD, or 2BC.
2. Dimensions A, B, J, and K.
3. Ball bearing die sets will be furnished with straight steel sleeve bushings or demountable ball bearing bushings.
4. Dimension "T" is minimum shut height.
5. Post diameter "O" & "P". (O and P should be different for 2BD and 2BC.)
6. Custom die sets may not be returned for credit.
7. Quantity needed.

Two Post Die Sets Dimensions furnished when customer specifies only A and B dimensions.

Die Space L to R A	Post Diameter O	Post Diameter P	D.H. Thickness J	P.H. Thickness K	F for Sleeve Bushing	F for Demountable Bushing	C For O Post	C for P Post (Sleeve Bushing)	C for P Post (Demountable Bushing)	S
6" to 8"	1	--	1 1/4	1 1/4	2 11/16	2 7/8	1 3/4	--	--	--
9" to 12"	1 1/4	1	1 1/2	1 1/2	2 15/16	3 1/16	1 7/8	2	2	A + 2F
13" to 16"	1 1/2	1 1/4	1 1/2	1 1/2	3 3/8	3 9/16	2 1/8	2 1/4	2 3/8	A + 2F
17" to 22"	1 3/4	1 1/2	1 3/4	1 3/4	3 5/8	3 13/16	2 1/4	2 3/8	2 3/8	A + 2F
23" to 28"	2	1 3/4	2	2	4 1/8	4 5/16	2 1/2	2 3/4	2 3/4	A + 2F
29" to 40"	2	1 3/4	2 1/2	2 1/2	4 1/8	4 5/16	2 1/2	2 3/4	2 3/4	A + 2F
41" to 65"	2 1/2	2	3	3	4 3/4	5	2 7/8	3 1/8	3 1/8	A + 2F

Custom, Four Post Ball Bearing Die Sets

Four Post - Type 4BB

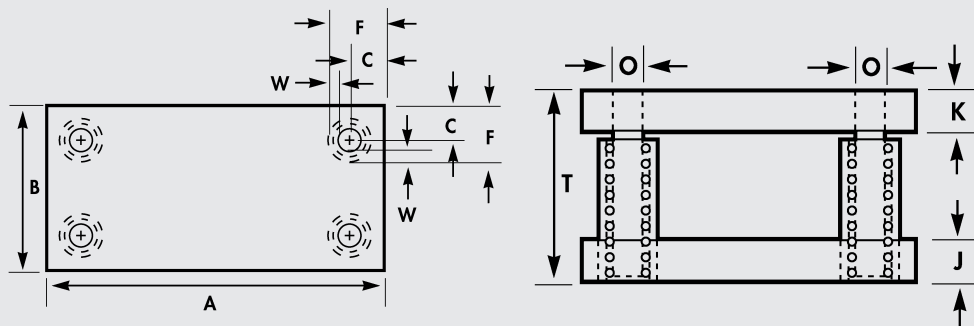

Right front pin offset 1/4" to outside.

Ball Bearing Component Selection


Refer to pages 26 and 27 for the correct selection of operating condition and components. Please note that on long stroke applications, the pin and cage can be disengaged **only** if the press is operated at less than 150 spm and in a vertical position with accurate ram gib alignment.

Maximum Pin Length

= Minimum Shut Height - 3/4"

Maximum Straight Sleeve Length

= Minimum Shut Height - Punch Holder Thickness - 1/4"

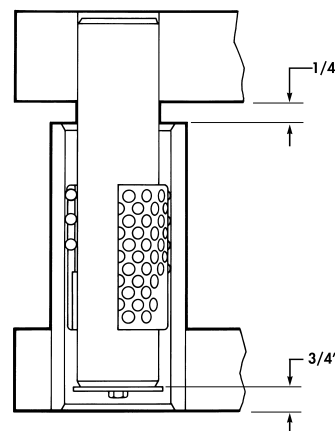

Tool at Minimum Shut Height
(die life depleted)

Four Post Die Sets

Dimensions furnished when customer specifies only A and B dimensions.

Die Space L to R A	Post Diameter O	D.H. Thickness J	P.H. Thickness K
8" to 10"	1	1 1/4	1 1/4
11" to 16"	1 1/4	1 1/2	1 1/2
17" to 22"	1 1/2	1 3/4	1 3/4
23" to 28"	1 3/4	2	2
29" to 40"	2	2 1/2	2 1/2
41" to 65"	2 1/2	3	3

These dimensions apply to both two post and four post sets.

Nominal Guide Post Diameter	C	Sleeve Bushing		Demountable Bushings	
		F	W	F	W
1"	1 3/4	2 11/16	7/16	2 7/8	9/16
1 1/4"	1 7/8	2 15/16	7/16	3 1/16	9/16
1 1/2"	2 1/8	3 3/8	1/2	3 9/16	11/16
1 3/4"	2 1/4	3 5/8	1/2	3 13/16	11/16
2"	2 1/2	4 1/8	5/8	4 5/16	13/16
2 1/2"	2 7/8	4 3/4	5/8	5	13/16
3"	3 1/4	--	--	5 5/8	7/8

Ground Plate Specifications

- **AISI 1020 Mild Steel Plate** - 21 sizes in stock, from 1/2" to 4".
- **Blanchard Grinding Available** - call for details.
- **Also available in aluminum** - not stocked, specify grade.
- **Send us your prints** - Our email is: STDDIE@readytechnology.com


Pertinent Die Set Standards

Flatness Plates	.0005 per lineal foot
Parallelism Plates	.001 per lineal foot
Thickness Plates	±1/16 stock sets
Thickness Plates	+ 1/16 -1/8 special sets
Shank Diameter	+ .000 -.002
Guide Pins Squareness	.001 in 6 inches
Guide Pins Parallelism	.001 in 6 inches
Guide Bushings Squareness	.001 in 6 inches
Guide Bushings Parallelism	.001 in 6 inches
Parallelism Assembled Die Set	.0015 per lineal foot

Blanchard Ground Stripper Plates

- Burned edges
- Thickness +1/16 / - 0
- AISI 1020 steel available from stock

Overall Size	Thickness	Overall Size	Thickness
SP - 6" x 18"	1/2	SP - 18" x 18"	1/2
	3/4		3/4
	1		1
	1 1/4		1 1/4
SP - 10" x 18"	1 1/2	SP - 12" x 24"	1 1/2
	1 1/4		1 1/4
	1		1
	3/4		3/4
SP - 14" x 18"	1/2	SP - 24" x 25"	1/2
	3/4		3/4
	1		1
	1 1/4		1 1/4

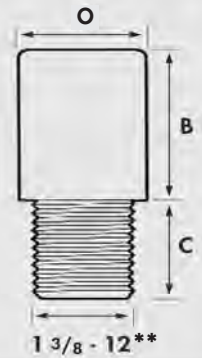

**PS-O 5/8-11 only

Threaded Shank Selection

Diameter O	Length B	Length Thread C	Catalog Number
1"	13/4"	1 3/4	PS-0
1 1/2"	2"	1	PS-1
		1 1/4	PS-2
		1 3/8	PS-3
		1 1/2	PS-4
		1 5/8*	PS-5
		1 3/4	PS-6
		2*	PS-7
		2 1/4	PS-8
		2 1/2*	PS-9
1 9/16"	2"	1	PS-11
		1 1/4	PS-12
		1 3/8	PS-13
		1 1/2	PS-14
		1 5/8*	PS-15
		1 3/4	PS-16
		2*	PS-17
		2 1/4	PS-18
		2 1/2*	PS-19
2"	2 3/4"	1 1/4	PS-21
		1 3/8	PS-22
		1 1/2	PS-23
		1 5/8*	PS-24
		1 3/4	PS-25
		2*	PS-26
		2 1/4	PS-27
		2 1/2*	PS-28
2 1/2"	2 3/4"	1 1/4	PS-31
		1 3/8	PS-32
		1 1/2	PS-33
		1 5/8*	PS-34
		1 3/4	PS-35
		2*	PS-36
		2 1/4	PS-37
		2 1/2*	PS-38
3"	2 3/4"	1 1/4	PS-41
		1 3/8	PS-42
		1 1/2	PS-43
		1 5/8*	PS-44
		1 3/4	PS-45
		2*	PS-46
		2 1/4	PS-47
		2 1/2*	PS-48


* stock lengths

Aluminum Die Sets, Plates, Ram and Mold Plates

Advantages of Aluminum:

- One-third the weight of steel
- Faster and easier setup
- Less wear and tear on the machine (clutch, brake, ram, ...)
- Easy machinability means 20-35% increased feed rates
- Uses existing conventional cuttings tools
- Draws heat away from tooling, then dissipates heat quickly
- Rust free, least susceptible to elements
- Impervious to typical (water soluble) die lubes
- Non-magnetic - good environment for in-die sensing
- Stress relieved in the process - a stable material before/after machining
- Easily recyclable

Note: It is recommended to finish heavy (point pressures) machining before grinding for best results. We do not recommend using steel and aluminum plates in a die set combination.

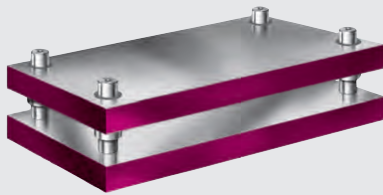

Four Post - Type 4P



Back Post - Type 2B



Center Post - Type 2C

Comparative Technical Data	Physical & Mechanical Properties	Tensile Strength (psi)	Yield Strength (psi)	Density (lb/inch ³)	Thermal Conductivity*	Thermal Expansion**	Modulus of Elasticity***	Typical Hardness (Rc equivalent)
Hot Rolled Steel	1020	64,000	50,000	.283	20.0	6.3	30	135B (12Rc)
Aircraft Aluminum	6013	58,000	54,000	.098	95	13.0	10.1	120B (11Rc)
Aircraft Aluminum	6061	46,000	42,000	.098	96	13.1	10.0	95B (8Rc)
Aircraft Aluminum	7075	75,000	73,000	.101	75	13.1	10.4	150B (14Rc)
Aircraft Aluminum	QC7	79,000	64,000	.102	91	12.8	10.3	167B (17Rc)
Alloy Steel	4140	102,000	90,000	.282	24.7	6.2	30	220B (21Rc)

* (btu/ft/hr/ft²/°F)

** average coefficient (x 10⁻⁶/in./°F)

*** (x 10⁶ lbs./in.²)

READY Plain and Ball Bearing Components

In the following 17 pages, you will see a number of innovative ideas designed to increase the performance of your stamping tools, reduce your inventory costs, simplify die assembly and maintenance, and maximize available die space.

Here are some of the highlights:

- Each Ready pin serves a dual function - it can operate as a plain bearing pin or a ball bearing guide pillar. This saves you the cost of a dual inventory.
- Ready's Selective Fit™ system matches each pin to the correct bushing to achieve the proper fit. Each part is color-coded (white, blue, or yellow), so as long as the color spot on the pin matches that of the bushing, the running clearance in each pin/bushing pair in your tool will be identical.

Since the clearance grows in proportion with the pin diameter, Selective Fit™ automatically gives you the proper running fit for your application.

- You now have a choice of clamping methods with our demountable pins. You can secure the flange with traditional toe clamps and screws, or you can hold the pin in place with a stop washer mounted in the underside of the die shoe. By eliminating the toe clamps you gain extra die space.
- Another innovation which saves space is Ready's patented Ring System. In effect you can now use our ball bearing sleeve bushing like a demountable bushing. Since the sleeve bushing and Ring System clamps have a smaller footprint than a traditional demountable bushing you save on die space. Please refer to page 19 for details.

INCH Plain Bearing Components

Precision Guide Pins..... 14

Demountable Pins..... 14

Demountable Sintered Bronze Bushings..... 15

Demountable Steel Bushings..... 15

Double Diameter Pins..... 16

INCH Ball Bearing Components

Precision Guide Pins..... 20

Ball Bearing Cages..... 20

Straight Sleeve Bushings..... 21

Demountable Bushings..... 21

Demountable Pins..... 22

Selecting the Proper Operating Conditions..... 24

Selecting the Correct Components..... 25

- Guide Pins
- Sleeve Bushings
- Cages

Selection Chart..... 26

READY Plain Bearing Components

3 types of pins, 2 types of bushings

Precision Guide Pins (-825)

Our Precision Guide Pins are designed to be used with either plain bearing or ball bearing bushings.

Vacuum degassed, ball bearing quality steel is induction hardened to 60 - 64 Rc, then core tempered for toughness. This produces an optimum combination of wear resistance for long operating life and shock resistance for safety.

Demountable Pins (-835)

Our Demountable Pins are designed for use in either plain bearing or ball bearing applications. Like our precision press fit pins, they are case hardened to 60 - 64 Rc, then core tempered for toughness.

They can be assembled to the same die set plate hundreds of times without distorting the hole center distances or damaging the holes themselves. So they not only simplify die building and maintenance, but they ensure maximum accuracy as well.

Ready demountable pins can be held in place either with toe clamps and screws, or with a retainer plug. This second option increases the die space available.

Double Diameter Pins (-55)

Our double diameter pins are also designed for use with ball bearing as well as plain bearing bushings. They are case hardened to 60-64 Rc for wear resistance, then core tempered for toughness. A tapped hole is provided at the end of the pin for the ball cage assembly.

The press fit diameter is interchangeable with familiar brands of plain bearing and ball bearing pins, so Ready double diameter pins may be used for die maintenance as well as for new tooling.

**Bore Sizes for Plain Bearing
Pins and Bushings**

Pin Diameter	-825, -835 Bore Diameter	-55 Bore Diameter	-2x5, -6x5 Bore Diameter
3/4"	--	0.7506 0.7500	1.2506 1.2500
1"	0.9991 0.9985	1.0006 1.0000	1.5006 1.5000
1 1/4"	1.2489 1.2482	1.2506 1.2500	1.7506 1.7500
1 1/2"	1.4989 1.4982	1.5006 1.5000	2.0007 2.0000
1 3/4"	1.7489 1.7482	1.7506 1.7500	2.2507 2.2500
2"	1.9989 1.9982	2.0007 2.0000	2.5007 2.5000
2 1/2"	2.4986 2.4979	2.5007 2.5000	3.2509 3.2500
3"	2.9986 2.9974	3.0007 3.0000	3.7509 3.7500

Demountable Sintered Bronze Bushings (-235, -245, -285)

Our Sintered Bronze Bushings set a new standard of performance for stamping die guide bushings. A layer of bronze is sintered to the inside diameter of a steel bushing, creating a mechanical bond at the bronze/steel interface stronger than that of traditional plated bushings. Please refer to the following page for details.

Demountable Steel Bushings (-645)

Our Steel Bushings are manufactured to the same high level of precision as our Sintered Bronze Bushings. If operated at moderate speeds and side loads with good lubrication, they are an economic substitute for sintered bronze bushings. These two types of bushings are fully interchangeable.

Our patented Sintered Bronze Bushings offer many advantages over plated bronze bushings.

- **Thicker Bronze:** The sintered bronze in our bushings is substantially thicker than the plating technology it replaces.
- **Porous Surface:** Holds the lubrication oil where you need it most, to resist wear. Sintered bronze is porous bronze, up to 40% porosity.
- **Stronger Bond:** Our patented process forms a unique fusion bond so the bronze and substrate become one. See the 1000x magnification in the adjacent panel.
- **Wear Resistance:** The combination of increased thickness, porosity and stronger bonding means our bushing is your best choice for high speed and eccentric loading. The longest life possible under extreme conditions.

Bronze plating is not a simple process. If the bushing is dirty or there are contaminants in the plating solution, the bronze will not adhere properly and will peel away from the surface. The fourth batch of bushings, for example, will be less likely to be defect-free than the first batch placed in a tank with fresh plating solution.

The second problem with plating is that the thickness of the bronze layer depends on the plating time. A thick bronze layer is simply too costly to produce, and on large diameter bushings in particular, problems arise when the thin plating wears away and the underlying steel comes in contact with the guide pin.

READY's Sintered Bronze Bushings solve both problems. Using a patented manufacturing process, a layer of bronze is sintered to the inside diameter of the steel bushing, creating a strong, reliable mechanical bond. The thickness of the bronze layer is not limited by time or cost con-

straints, so it is thicker than plated bronze, and it increases proportionally with the bushing diameter.


You can test the bond strengths yourself. Cut through the diameter of a plated bushing and you stand a good chance to see peeling. Do the same with our sintered bushing and you will see that the bronze-steel bond is unaffected. If you need to shorten the inserted diameter to fit our bushing into a thin stripper plate, you can do so without harming it.

There is a third advantage to our sintered bushings. Because sintered bronze is porous, it holds the lubrication oil in place and helps to maintain an unbroken lubrication layer, which improves wear resistance. The bronze pores act as small oil reservoirs, so our Sintered Bronze Bushings are more forgiving if maintenance has been overlooked. However, for best results, we recommend regular, periodic lubrication with a high viscosity oil.


Compare the Bronze Thickness

Take A Closer Look ...

Actual magnified views of bushing cross sections.

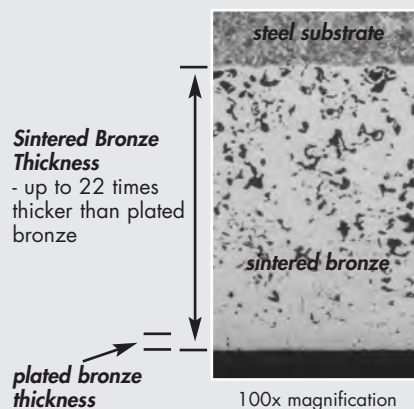

This view reveals the greater bronze thickness and the porosity of our Sintered Bronze Bushing.

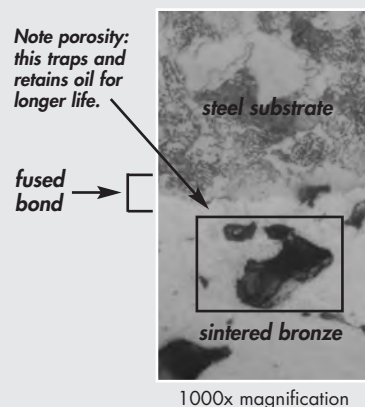


This view reveals the fusion bonding of the thick sintered bronze layer to the steel substrate.

Compare The Thickness ...

Nominal Diameter O Nom.	Plated Bronze Layer Thickness	READY Sintered Bronze Layer Thickness
1"	0.002"	0.027"
1 1/4"	0.002"	0.030"
1 1/2"	0.002"	0.033"
1 3/4"	0.002"	0.034"
2"	0.002"	0.037"
2 1/2"	0.002"	0.041"
3"	0.002"	0.044"

Precision Pin Selection Guide (-825)

Nominal Pin Diameter O	Length L	Catalog Number	Nominal Pin Diameter O	Length L	Catalog Number
1"	3 1/4	5-0813-825	1 3/4"	5	5-1420-825
	3 3/4	5-0815-825		5 3/4	5-1423-825
	4 1/4	5-0817-825		6 1/2	5-1426-825
	4 1/2	5-0818-825		7	5-1428-825
	4 3/4	5-0819-825		7 1/2	5-1430-825
	5	5-0820-825		8	5-1432-825
	5 1/4	5-0821-825		8 1/2	5-1434-825
	5 1/2	5-0822-825		9	5-1436-825
	5 3/4	5-0823-825		9 1/2	5-1438-825
	6	5-0824-825		10	5-1440-825
	6 1/2	5-0826-825		10 1/2	5-1442-825
	7	5-0828-825		11	5-1444-825
	7 1/2	5-0830-825		11 1/2	5-1446-825
	8	5-0832-825		12	5-1448-825
	8 1/2	5-0834-825		12 1/2	5-1450-825
	9	5-0836-825		13	5-1452-825
1 1/4"	4 1/4	5-1017-825		14	5-1456-825
	4 3/4	5-1019-825		15	5-1460-825
	5 1/4	5-1021-825		17	5-1468-825
	5 1/2	5-1022-825	2"	5 3/4	5-1623-825
	5 3/4	5-1023-825		6 1/2	5-1626-825
	6	5-1024-825		7 1/4	5-1629-825
	6 1/2	5-1026-825		7 1/2	5-1630-825
	7	5-1028-825		7 3/4	5-1631-825
	7 1/2	5-1030-825		8	5-1632-825
	8	5-1032-825		8 1/2	5-1634-825
	8 1/2	5-1034-825		9	5-1636-825
	9	5-1036-825		9 1/2	5-1638-825
	10	5-1040-825		10	5-1640-825
	11	5-1044-825		10 1/2	5-1642-825
	12	5-1048-825		11	5-1644-825
1 1/2"	4 1/4	5-1217-825		11 1/2	5-1646-825
	5	5-1220-825		12	5-1648-825
	5 3/4	5-1223-825		12 1/2	5-1650-825
	6	5-1224-825		13	5-1652-825
	6 1/2	5-1226-825		14	5-1656-825
	7	5-1228-825		15	5-1660-825
	7 1/2	5-1230-825		16	5-1664-825
	8	5-1232-825		17	5-1668-825
	8 1/2	5-1234-825		18	5-1672-825
	9	5-1236-825	2 1/2"	8	5-2032-825
	9 1/2	5-1238-825		8 3/4	5-2035-825
	10	5-1240-825		9 1/2	5-2038-825
	10 1/2	5-1242-825		10	5-2040-825
	11	5-1244-825		11	5-2044-825
	11 1/2	5-1246-825		12	5-2048-825
	12	5-1248-825		13	5-2052-825
	12 1/2	5-1250-825		14	5-2056-825
	13	5-1252-825		17	5-2068-825
	14	5-1256-825		18	5-2072-825
3"				20	5-2080-825
				8	5-2432-825
				9	5-2436-825
				10	5-2440-825
				11	5-2444-825
				12	5-2448-825
				13	5-2452-825
				14	5-2456-825
				17	5-2468-825
				20	5-2480-825




Demountable Pin Selection Guide (-835)

Nominal Pin Diameter O	Flange B	Length E	Length F	Catalog Number	Nominal Pin Diameter O	Flange B	Length E	Length F	Catalog Number
1"	1.31	7/8"	4	5-0816-835	2"	2.50	1 15/16"	5	5-1620-835
			4 1/2	5-0818-835				5 1/2	5-1622-835
			5	5-0820-835				6	5-1624-835
			5 1/2	5-0822-835				6 1/2	5-1626-835
			6	5-0824-835				7	5-1628-835
			6 1/2	5-0826-835				7 1/2	5-1630-835
			7	5-0828-835				8	5-1632-835
			7 1/2	5-0830-835				8 1/2	5-1634-835
								9	5-1636-835
								9 1/2	5-1638-835
1 1/4"	1.56	1 3/16"	4	5-1016-835				10	5-1640-835
			4 1/2	5-1018-835				11	5-1644-835
			5	5-1020-835				12	5-1648-835
			5 1/2	5-1022-835	2 1/2"	3.00	1 15/16"	5	5-2020-835
			6	5-1024-835				5 1/2	5-2022-835
			6 1/2	5-1026-835				6	5-2024-835
			7	5-1028-835				6 1/2	5-2026-835
			7 1/2	5-1030-835				7	5-2028-835
			8	5-1032-835				7 1/2	5-2030-835
			8 1/2	5-1034-835				8	5-2032-835
			9	5-1036-835				8 1/2	5-2034-835
			9 1/2	5-1038-835				9	5-2036-835
			10	5-1040-835				9 1/2	5-2038-835
1 1/2"	1.87	1 7/16"	5	5-1220-835				10	5-2040-835
			5 1/2	5-1222-835				11	5-2044-835
			6	5-1224-835				12	5-2048-835
			6 1/2	5-1226-835				13	5-2052-835
			7	5-1228-835				14	5-2056-835
			7 1/2	5-1230-835	3"	3.50	2 3/16"	6	5-2424-835
			8	5-1232-835				7	5-2428-835
			8 1/2	5-1234-835				8	5-2432-835
			9	5-1236-835				9	5-2436-835
			9 1/2	5-1238-835				10	5-2440-835
			10	5-1240-835				11	5-2444-835
			11	5-1244-835				12	5-2448-835
1 3/4"	2.25	1 11/16"	5	5-1420-835				14	5-2456-835
			5 1/2	5-1422-835				16	5-2464-835
			6	5-1424-835					
			6 1/2	5-1426-835					
			7	5-1428-835					
			7 1/2	5-1430-835					
			8	5-1432-835					
			8 1/2	5-1434-835					
			9	5-1436-835					
			9 1/2	5-1438-835					
2"	2.50	1 13/16"	10	5-1440-835					
			11	5-1444-835					
			12	5-1448-835					

Guide Pin
Tap SizesRecommended
Seating Torque

Nominal Pin Diameter O	Tap Size	Lbs. - Feet
1 - 1 1/4"	5/16 - 18 N.C.	26
1 1/2 - 1 3/4 - 2"	3/8 - 16 N.C.	47
2 1/2" - 3"	1/2 - 13 N.C.	112

For Demountable Pin Tap Sizes, see page 17.




Demountable Sintered Bronze Bushings (-235, -245, -285)

Short Shoulder Bushings



Inside Diameter A		B	C	C1	E	F	L	Sintered Bronze Catalog Number
Nom.	Dec.							
1"	1.000	1 1/2	1.72	1.84	15/16	13/16	1 3/4	6-08-235
1 1/4"	1.250	1 3/4	1.95	2.09	1 1/8	13/16	1 15/16	6-10-235
1 1/2"	1.500	2	2.19	2.35	1 3/16	13/16	2	6-12-235
1 3/4"	1.750	2 1/4	2.50	2.66	1 3/8	1	2 3/8	6-14-235
2"	2.000	2 1/2	2.91	2.95	1 5/8	1	2 5/8	6-16-235
2 1/2"	2.500	3 1/4	3.66	3.66	1 7/8	1	2 7/8	6-20-235
3"	3.000	3 3/4	4.19	4.28	1 7/8	1	2 7/8	6-24-235



Standard Shoulder Bushings



Inside Diameter A		B	C	C1	E	F	L	Sintered Bronze Catalog Number
Nom.	Dec.							
1"	1.000	1 1/2	1.72	1.84	15/16	1 3/4	2 11/16	6-08-245
1 1/4"	1.250	1 3/4	1.95	2.09	1 1/8	2	3 1/8	6-10-245
1 1/2"	1.500	2	2.19	2.35	1 3/16	2	3 3/16	6-12-245
1 3/4"	1.750	2 1/4	2.50	2.66	1 3/8	2	3 3/8	6-14-245
2"	2.000	2 1/2	2.91	2.95	1 5/8	2	3 5/8	6-16-245
2 1/2"	2.500	3 1/4	3.66	3.66	1 7/8	2 1/2	4 3/8	6-20-245
3"	3.000	3 3/4	4.19	4.28	1 7/8	2 1/2	4 3/8	6-24-245

Extra Long Shoulder Bushings



Inside Diameter A		B	C	C1	E	F	L	Sintered Bronze Catalog Number
Nom.	Dec.							
1"	1.000	1 1/2	1.72	1.84	15/16	3	3 15/16	6-08-285
1 1/4"	1.250	1 3/4	1.95	2.09	1 1/8	3	4 1/8	6-10-285
1 1/2"	1.500	2	2.19	2.35	1 3/16	3	4 3/16	6-12-285
1 3/4"	1.750	2 1/4	2.50	2.66	1 3/8	3	4 3/8	6-14-285
2"	2.000	2 1/2	2.91	2.95	1 5/8	3	4 5/8	6-16-285
2 1/2"	2.500	3 1/4	3.66	3.66	1 7/8	3	4 7/8	6-20-285
3"	3.000	3 3/4	4.19	4.28	1 7/8	3	4 7/8	6-24-285

Demountable Steel Bushings (-645)

Standard Shoulder Bushings



Inside Diameter A		B	C	C1	E	F	L	Steel Catalog Number
Nom.	Dec.							
3/4"	.750	1 1/8	1.17	1.30	11/16	13/4	2 7/16	6-06-645
1"	1.000	1 1/2	1.72	1.85	15/16	13/4	2 11/16	6-08-645
1 1/4"	1.250	1 3/4	1.99	2.09	1 1/8	2	3 1/8	6-10-645
1 1/2"	1.500	2	2.19	2.35	1 3/16	2	3 3/16	6-12-645
1 3/4"	1.750	2 1/4	2.50	2.66	1 3/8	2	3 3/8	6-14-645
2"	2.000	2 1/2	2.91	3.06	1 5/8	2	3 5/8	6-16-645

Note: The Demountable Clamp Data is located on page 17.


Double Diameter Pins

Double Diameter Pin Selection Guide (-55)

Nominal Pin Diameter O	Length B	Length L	Catalog Number
3/4"	1 1/8"	4	5-0616-55
		4 1/2	5-0618-55
		5	5-0620-55
		5 1/2	5-0622-55
		6	5-0624-55
		6 1/2	5-0626-55
		7	5-0628-55
		7 1/2	5-0630-55
1"	1 1/2"	8	5-0632-55
		4	5-0816-55
		4 1/2	5-0818-55
		5	5-0820-55
		5 1/2	5-0822-55
		6	5-0824-55
		6 1/2	5-0826-55
		7	5-0828-55
		7 1/2	5-0830-55
		8	5-0832-55
1 1/4"	1 3/4"	8 1/2	5-0834-55
		9	5-0836-55
		9 1/2	5-0838-55
		10	5-0840-55
		4	5-1016-55
		4 1/2	5-1018-55
		5	5-1020-55
		5 1/2	5-1022-55
		6	5-1024-55
		6 1/2	5-1026-55
1 1/2"	2"	7	5-1028-55
		7 1/2	5-1030-55
		8	5-1032-55
		8 1/2	5-1034-55
		9	5-1036-55
		9 1/2	5-1038-55
		10	5-1040-55
		11	5-1044-55
		12	5-1048-55
		14	5-1056-55

Nominal Pin Diameter O	Length B	Length L	Catalog Number
1 3/4"	2 1/4"	6	5-1424-55
		6 1/2	5-1426-55
		7	5-1428-55
		7 1/2	5-1430-55
		8	5-1432-55
		8 1/2	5-1434-55
		9	5-1436-55
		9 1/2	5-1438-55
		10	5-1440-55
		11	5-1444-55
		12	5-1448-55
		13	5-1452-55
		14	5-1456-55
		15	5-1460-55
		17	5-1468-55
2"	2 1/2"	6	5-1624-55
		6 1/2	5-1626-55
		7	5-1628-55
		7 1/2	5-1630-55
		8	5-1632-55
		8 1/2	5-1634-55
		9	5-1636-55
		9 1/2	5-1638-55
		10	5-1640-55
		11	5-1644-55
		12	5-1648-55
		13	5-1652-55
		14	5-1656-55
		15	5-1660-55
		17	5-1668-55
2 1/2"	3 1/2"	8	5-2032-55
		8 1/2	5-2034-55
		9	5-2036-55
		10	5-2040-55
		11	5-2044-55
		12	5-2048-55
		13	5-2052-55
		14	5-2056-55
		15	5-2060-55
		17	5-2068-55
		19	5-2076-55
3"	4"	9	5-2436-55
		10	5-2440-55
		11	5-2444-55
		12	5-2448-55
		13	5-2452-55
		14	5-2456-55
		15	5-2460-55
		17	5-2468-55
		19	5-2476-55

- Ideal for retro-fits to improve productivity and decrease costly maintenance.
- Proven quality and dependability in dies for years.
- Readily available.
- Oversize press fit end for die shoe and nominal size end for bushing.
- Interchangeable with familiar brands.

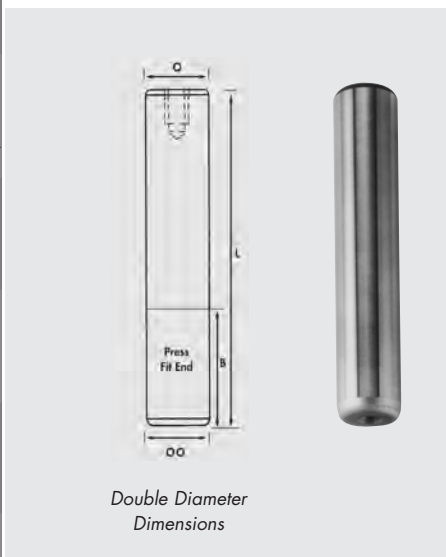

Double Diameter Pin Dimensions

Pin Diameter	OO +0 -.0005	Length of Press Fit B
3/4"	0.752	1 1/8"
1"	1.002	1 1/2"
1 1/4"	1.2525	1 3/4"
1 1/2"	1.5025	2"
1 3/4"	1.7525	2 1/4"
2"	2.0025	2 1/2"
2 1/2"	2.503	3 1/2"
3"	3.003	4"


Guide Pin
Tap Sizes

Recommended
Seating Torque


Nominal Pin Diameter O	Tap Size	Lbs. - Feet
1 - 1 1/4"	5/16 - 18 N.C.	26
1 1/2 - 1 3/4 - 2"	3/8 - 16 N.C.	47
2 1/2" - 3"	1/2 - 13 N.C.	112

Demountable Pin Clamp Data

Diameter O	Pillar Clamp Data						
	Radius		Q	Qty per Pillar	Catalog Number	Socket Head Cap Screws	
	M	N				S	T
1"	13/16	1 1/8	7/8	3	6-90-1	1/4 - 20 x 3/4	5/8
1 1/4"	63/64	1 7/16	1	3	6-93-1	5/16 - 18 x 7/8	3/4
1 1/2"	1 1/8	1 9/16	1 1/16				
1 3/4"	1 19/64	1 3/4	1 3/8				
2"	1 27/64	1 7/8	1 9/16				
2 1/2"	1 43/64	2 1/8	1 3/4	4	6-93-1	5/16 - 18 x 7/8	3/4
3"	1 59/64	2 3/8	1 15/16				




Three clamps equally spaced for 1" - 1 1/2" diameter pins.



Four clamps equally spaced for 1 3/4" - 3" diameter pins.

Pin Diameter O	Pillar Retaining Plug Data								
		min.	min.	A	B	D2	D3	Catalog Number	Screw
	D1	L	H						
1"	1.50	.25	1.25	.20	.36	.99	1.49	6-08-35	3/8 - 16
1 1/4"	1.75	.25	1.75	.20	.55	1.24	1.74	6-10-35	1/2 - 13
1 1/2"	2.00	.25	2.00	.20	.55	1.49	1.99	6-12-35	1/2 - 13
1 3/4"	2.25	.25	2.45	.20	.73	1.74	2.24	6-14-35	5/8 - 11
2"	2.50	.25	2.70	.20	.73	1.99	2.49	6-16-35	5/8 - 11
2 1/2"	3.00	.25	2.70	.20	.73	2.49	2.99	6-20-35	5/8 - 11
3"	3.50	.25	3.15	.20	.93	2.99	3.49	6-24-35	3/4 - 10

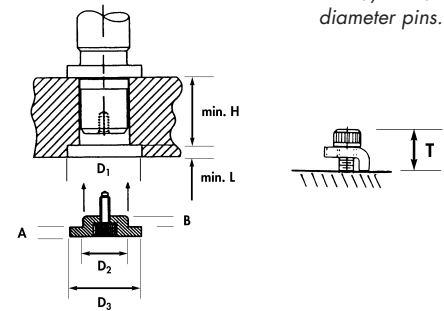

Demountable Bushing Clamp Data

Clamp Arrangement Selection Data

L - R Feed

F - B Feed

Round Dies

NOTE: If not specified, clamp arrangement L-R will be furnished. Clamp arrangement F-B is furnished on center pin sets.

Clamp Numbers:
6-90-1, 6-93-1, 6-95-1

We ship the appropriate number of clamps and SHCS with each demountable bushing ordered.

APPLICATION	Nominal Diameter Bush. ID Pin OD	Clamp Data											
		Location				Size				Clamp No.	Per Unit	Screw Size	T
		M	N	L	K	A	B	C	D				
Bushings, Demountable Shoulder and Short Shoulder	3/4"	25/32	1 1/64	90°	45°	15/32	1/2	.125	7/32	6-95-1	2	1/4 - 20 x 5/8	15/32
	1"	1 1/16	1 3/8	90°	45°	5/8	5/8	.193	11/32	6-90-1	2	1/4 - 20 x 3/4	39/64
	1 1/4"	1 7/32	1 17/32	120°	45°	25/32	5/8	.250	7/16	6-93-1	3	5/16 - 18 x 3/4	3/4
	1 1/2"	1 3/8	1 11/16										
	1 3/4"	1 1/2	1 13/16	35°	10°								
	2"	1 45/64	2 1/64			25/32	5/8	.250	7/16	6-93-1	4	5/16 - 18 x 3/4	3/4
	2 1/2"	2 5/64	2 25/64	40°	5°								
	3"	2 5/16	2 5/8	45°	0°								

Ball Bearing Cages

Operating Conditions

For optimum performance guide pins should be mounted in the punch holder. This allows the ball cage to reposition itself, if preload is relieved on each press stroke. Complete assemblies (guide pin, ball cage and bushing) should be ordered to insure proper fit.

Recommended Lubrication

We recommend lubricating the ball bushing assembly once each 8 hour shift. Use a refined mineral oil with a viscosity of 290/340 SSU at 100° F, combining "EP" additives and rust inhibitors, such as Mobil Compound AA or Mobil Gear 626.

Installation Instructions for Sleeve Bushings Using Bushing Mount

1. Degrease bushing OD and die shoe bore with alcohol, acetone or other volatile solvent and wipe dry.
2. Apply Bushing Mount sparingly to both surfaces.
3. Wring bushing into die shoe.
4. Allow 4-hour cure at 72°F. To accelerate cure, heat with heat-lamp. Do not disturb bushing until cure is complete.
5. Honing is not required after installation.

Precision Guide Pins (-825) Demountable Pins (-835), and Double Diameter Pins (-55)

You can use any of our guide pins in ball bearing applications because each of the 3 styles is designed for dual purpose in both friction solid guiding and ball bearing guiding.

Vacuum degassed, ball bearing quality steel is induction hardened to 60-64 Rc, then core tempered for toughness. This produces an optimum combination of wear resistance for long

operating life and shock resistance for safety.

The guide pin retains the ball cage by means of a washer assembly. The cage is free to rotate 360°, so scoring and tracking on the guide pin surface are eliminated or reduced.

Our guide pins are interchangeable with all the major brands.

Ball Bearing Cages (-8225)

Our Ball Cages use AFBMA Grade 10 precision ball bearings, accurate to within .0001". These ball bearing have been chosen for their high hardness and excellent resistance to wear and deformation. They are retained securely in place by a hardened aluminum alloy cage, heat treated for toughness and wear resistance.

Each ball bearing is held in place with 360° staking. This is a safer design than two or four point staking.

Failure tests show that a 360° staked ball requires a substantially higher force to become dislodged.

Ready Ball Cages are free to rotate within the ball bushing assembly, so wear on the guide pin and bushing is reduced. The ball bearings are arranged in a double spiral pattern, so that each ball bearing travels along its own unique path. Tracking is reduced and operating life is enhanced.

Demountable Ball Bearing Bushings (-855) and Straight Sleeve Bushings (-865)

We offer two types of ball bearing bushings. Our Demountable Ball Bearing Bushings are flange mounted and held in place with toe clamps and screws. They are interchangeable with familiar brands of demountable ball bushings.

Our Straight Sleeve bushings offer something quite new. All sleeve bushings 1 1/2" in diameter and larger incorporate our patented Ring System clamping groove, which provides several benefits. Please refer to the following page for details.

If you prefer, however, you can secure our sleeve bushings in the traditional

manner with Bushing Mount. Up to eleven tons of force are required to dislodge the bushing once the Bushing Mount has properly cured. Please follow the assembly procedure outlined in the side panel on this page. Bushing Mount compound is available upon request.

Our ball bearing bushings are interchangeable with most major brands; for brands with a smaller register fit than ours, we have left the OD of our straight sleeve bushing soft, enabling you to turn down the OD to match. See your READY representative for details.


The Ring System -

Our Straight Sleeve Bushing Has Just Become Demountable

Our patented Ring System consists of a slightly curved clamp which fits into a 4° angled groove. As the clamping screw is tightened the clamp wedges against the slot, holding the bushing securely in place.

This design produces real benefits. Since the Ring System makes the sleeve bushing easy to assemble and disassemble, die building and maintenance are simplified. Ring System bushings are less costly to produce than demountable bushings, so you save on purchase cost.

In addition, Ring System bushings give you more die space. You can see in the table below that the Ring System sleeve bushing takes up less space than a demountable ball bearing bushing of traditional design.

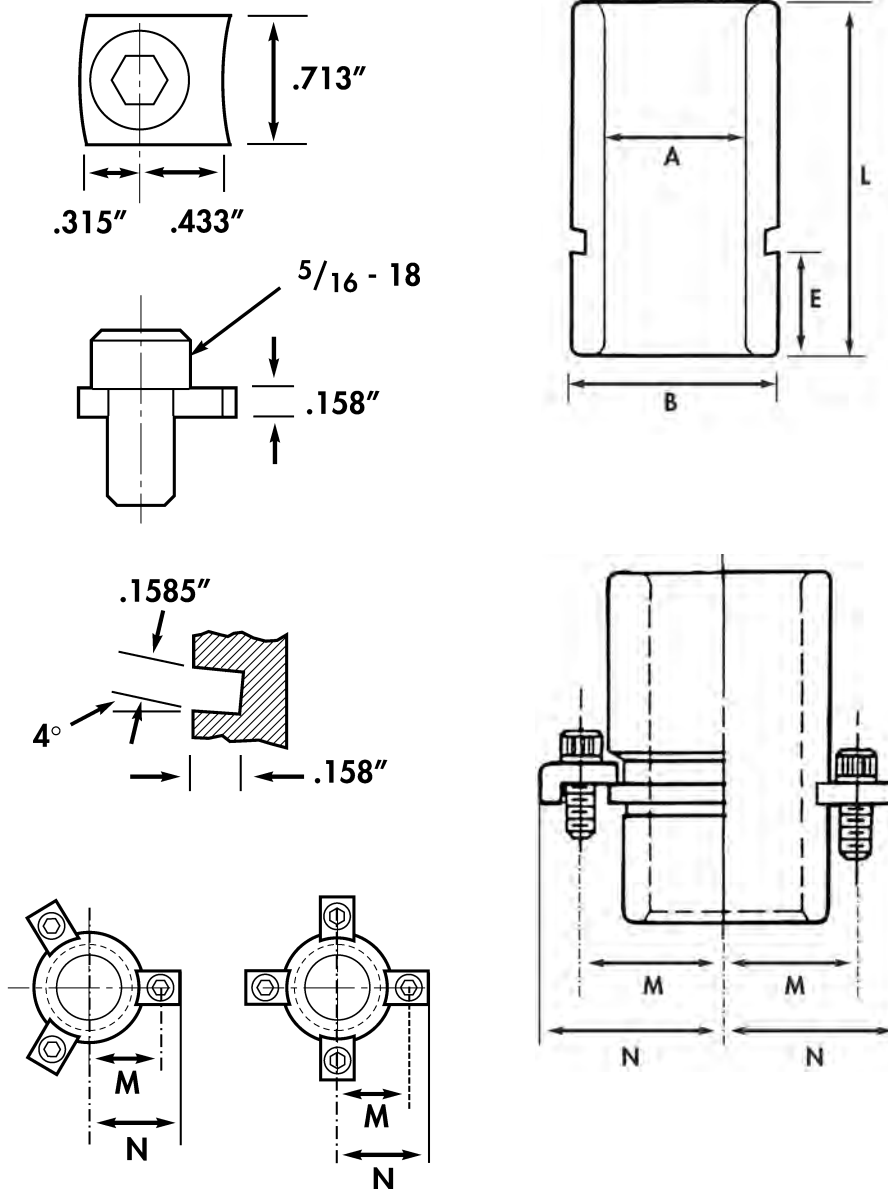


Clamp Data


Pin Diameter	Demountable Bushing					Ring System Sleeve Bushing				
	M	N	Clamps per Bushing	Clamp	Screw	M	N	Clamps per Bushing	Clamp	Screw
1"	1.313	1.688	3	6-93-1	5/16 - 18 X 3/4 lg	-	-	-	6-B2-1	5/16 - 18 X 3/4 lg
1 1/4"	1.438	1.813	3			-	-	-		
1 1/2"	1.688	2.063	4			1.513	1.846	4		
1 3/4"	1.813	2.188	4			1.657	1.972	4		
2"	2.063	2.438	4			1.909	2.224	4		
2 1/2"	2.313	2.688	4			2.161	2.476	4		
3"	2.625	3.000	4			-	-	-		

Precision Pin Selection Guide (-825)

Nominal Pin Diameter O	Length L	Catalog Number	Nominal Pin Diameter O	Length L	Catalog Number
1"	3 1/4	5-0813-825	1 3/4"	5	5-1420-825
	3 3/4	5-0815-825		5 3/4	5-1423-825
	4 1/4	5-0817-825		6 1/2	5-1426-825
	4 1/2	5-0818-825		7	5-1428-825
	4 3/4	5-0819-825		7 1/2	5-1430-825
	5	5-0820-825		8	5-1432-825
	5 1/4	5-0821-825		8 1/2	5-1434-825
	5 1/2	5-0822-825		9	5-1436-825
	5 3/4	5-0823-825		9 1/2	5-1438-825
	6	5-0824-825		10	5-1440-825
	6 1/2	5-0826-825		10 1/2	5-1442-825
	7	5-0828-825		11	5-1444-825
	7 1/2	5-0830-825		11 1/2	5-1446-825
	8	5-0832-825		12	5-1448-825
	8 1/2	5-0834-825		12 1/2	5-1450-825
	9	5-0836-825		13	5-1452-825
1 1/4"	4 1/4	5-1017-825		14	5-1456-825
	4 3/4	5-1019-825		15	5-1460-825
	5 1/4	5-1021-825		17	5-1468-825
	5 1/2	5-1022-825	2"	5 3/4	5-1623-825
	5 3/4	5-1023-825		6 1/2	5-1626-825
	6	5-1024-825		7 1/4	5-1629-825
	6 1/2	5-1026-825		7 1/2	5-1630-825
	7	5-1028-825		7 3/4	5-1631-825
	7 1/2	5-1030-825		8	5-1632-825
	8	5-1032-825		8 1/2	5-1634-825
	8 1/2	5-1034-825		9	5-1636-825
	9	5-1036-825		9 1/2	5-1638-825
	10	5-1040-825		10	5-1640-825
	11	5-1044-825		10 1/2	5-1642-825
	12	5-1048-825		11	5-1644-825
1 1/2"	4 1/4	5-1217-825		11 1/2	5-1646-825
	5	5-1220-825		12	5-1648-825
	5 3/4	5-1223-825		12 1/2	5-1650-825
	6	5-1224-825		13	5-1652-825
	6 1/2	5-1226-825		14	5-1656-825
	7	5-1228-825		15	5-1660-825
	7 1/2	5-1230-825		16	5-1664-825
	8	5-1232-825		17	5-1668-825
	8 1/2	5-1234-825		18	5-1672-825
	9	5-1236-825	2 1/2"	8	5-2032-825
	9 1/2	5-1238-825		8 3/4	5-2035-825
	10	5-1240-825		9 1/2	5-2038-825
	10 1/2	5-1242-825		10	5-2040-825
	11	5-1244-825		11	5-2044-825
	11 1/2	5-1246-825		12	5-2048-825
	12	5-1248-825		13	5-2052-825
	12 1/2	5-1250-825		14	5-2056-825
	13	5-1252-825		17	5-2068-825
	14	5-1256-825		18	5-2072-825
				20	5-2080-825
1 3/4"	4 1/4	5-1017-825	3"	8	5-2432-825
	4 3/4	5-1019-825		9	5-2436-825
	5 1/4	5-1021-825		10	5-2440-825
	5 1/2	5-1022-825		11	5-2444-825
	5 3/4	5-1023-825		12	5-2448-825
	6	5-1024-825		13	5-2452-825
	6 1/2	5-1026-825		14	5-2456-825
	7	5-1028-825		17	5-2468-825
	7 1/2	5-1030-825		20	5-2480-825
	8	5-1032-825			




Ball Bearing Cage Selection Guide (-8225)



Diameter O	C	S	X	Catalog Number
1"	2	1 1/16	3/16	6-0808-8225
	2 1/2	1 5/16		6-0810-8225
	3	1 9/16		6-0812-8225
	3 1/4	1 13/16		6-0813-8225
	3 1/2	2 1/16		6-0814-8225
	3 3/4	2 5/16		6-0815-8225
1 1/4"	2 3/4	1 7/16	3/16	6-1011-8225
	3 1/4	1 11/16		6-1013-8225
	3 3/4	1 15/16		6-1015-8225
	4	2 3/16		6-1016-8225
	4 1/4	2 7/16		6-1017-8225
	4 3/4	2 15/16		6-1019-8225
1 1/2"	2 3/4	1 7/16	1/4	6-1211-8225
	3 1/2	1 13/16		6-1214-8225
	4 1/4	2 3/16		6-1217-8225
	4 1/2	2 7/16		6-1218-8225
	5	2 15/16		6-1220-8225
	5 1/2	3 7/16		6-1222-8225
1 3/4"	3 1/4	1 11/16	1/4	6-1413-8225
	4	2 1/16		6-1416-8225
	4 3/4	2 7/16		6-1419-8225
	5 1/4	2 15/16		6-1421-8225
	5 3/4	3 7/16		6-1423-8225
	6 1/4	3 15/16		6-1425-8225
2"	6 3/4	4 7/16	1/4	6-1427-8225
	3 3/4	1 15/16		6-1615-8225
	4 1/2	2 5/16		6-1618-8225
	5 1/4	2 11/16		6-1621-8225
	5 5/8	3 1/16		6-1623-8225
	6	3 7/16		6-1624-8225
2 1/2"	6 1/2	3 15/16	3/8	6-1626-8225
	7	4 7/16		6-1628-8225
	7 1/2	4 15/16		6-1630-8225
	5 3/4	3		6-2023-8225
	6 1/2	3 3/8		6-2026-8225
	7 1/4	3 3/4		6-2029-8225
3"	7 3/4	4 1/4	3/8	6-2031-8225
	8 1/4	4 3/4		6-2033-8225
	8 3/4	5 1/4		6-2035-8225
	5 3/4	3		6-2423-8225
	6 1/2	3 3/8		6-2426-8225
	7 1/4	3 3/4		6-2429-8225


Washer Assemblies

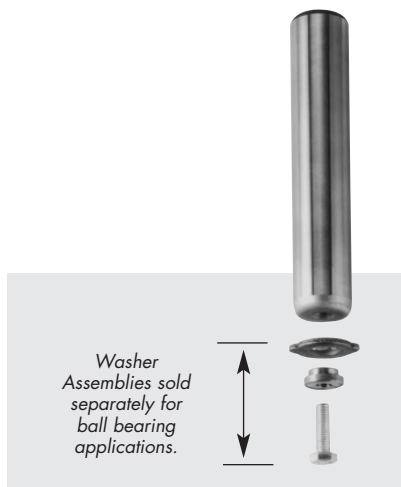

Nominal Pin Diameter O	Catalog Number
1"	6-0008-822
1 1/4"	6-0010-822
1 1/2"	6-0012-822
1 3/4"	6-0014-822
2"	6-0016-822
2 1/2"	6-0020-822
3"	6-0024-822

Straight Sleeve Bushing Selection Guide (-865)

Nominal Post Diameter O	A	B	E	Length L	Catalog Number
1"	1 3/8	1 7/8	n/a	2 1/2	6-0810-865
				3	6-0812-865
				3 1/2	6-0814-865
				4	6-0816-865
				4 1/2	6-0818-865
1 1/4"	1 5/8	2 1/8	n/a	5	6-0820-865
				3	6-1012-865
				3 1/2	6-1014-865
				4	6-1016-865
				4 1/2	6-1018-865
1 1/2"	1 7/8	2 1/2	1 3/8	5	6-1020-865
				6	6-1024-865
				3	6-1212-865
				3 3/4	6-1215-865
				4 1/2	6-1218-865
1 3/4"	2 1/8	2 3/4	1 5/8	5	6-1220-865
				5 1/2	6-1222-865
				6	6-1224-865
				7	6-1228-865
				8	6-1232-865
2"	2 1/2	3 1/4	1 7/8	3 1/2	6-1414-865
				4 1/4	6-1417-865
				5	6-1420-865
				5 1/2	6-1422-865
				6	6-1424-865
2 1/2"	3	3 3/4	1 7/8	7	6-1428-865
				8	6-1432-865
				9	6-1436-865
				4	6-1616-865
				4 3/4	6-1619-865
3"	3 1/2	4 1/4	1 7/8	5 1/2	6-1622-865
				6 1/4	6-1625-865
				7	6-1628-865
				8	6-1632-865
				9	6-1636-865
3 1/2"	4	4 3/4	1 7/8	10	6-1640-865
				6	6-2024-865
				6 3/4	6-2027-865
				7 1/2	6-2030-865
				8 1/2	6-2034-865
4"	4 1/2	5 1/4	1 7/8	9 1/2	6-2038-865
				10 1/2	6-2042-865
				6	6-2044-865
				6 3/4	6-2047-865
				7 1/2	6-2050-865

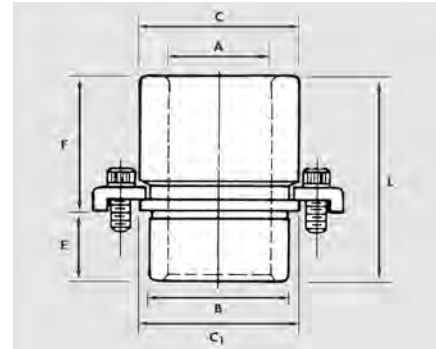


Demountable Bushing Selection Guide (-855)

Nominal Post Diameter O	A	B	C	C1	E	F	L	Catalog Number
1"	1 3/8	1 7/8	2 1/8	2.28	1 3/16	1 1/4	2 7/16	6-0805-855
						1 3/4	2 15/16	6-0807-855
						2 1/4	3 7/16	6-0809-855
1 1/4"	1 5/8	2 1/8	2 3/8	2.48	1 3/16	1 3/4	2 15/16	6-1007-855
						2 1/4	3 7/16	6-1009-855
						2 3/4	3 15/16	6-1011-855
1 1/2"	1 7/8	2 1/2	2 7/8	2.98	1 7/16	1 1/2	2 15/16	6-1206-855
						2 1/4	3 11/16	6-1209-855
						3	4 7/16	6-1212-855
1 3/4"	2 1/8	2 3/4	3 1/8	3.28	1 11/16	3 1/2	4 15/16	6-1214-855
						1 3/4	3 7/16	6-1407-855
						2 1/2	4 3/16	6-1410-855
2"	2 1/2	3 1/4	3 5/8	3.74	1 15/16	3 1/4	4 15/16	6-1413-855
						2	3 15/16	6-1608-855
						2 3/4	4 11/16	6-1611-855
2 1/2"	3	3 3/4	4 1/8	4.25	1 15/16	3 1/2	5 7/16	6-1614-855
						4 1/4	6 3/16	6-1617-855
						4	5 15/16	6-2016-855
3"	3 1/2	4 1/4	4 3/4	4.88	1 15/16	4 3/4	6 11/16	6-2019-855
						5 1/2	7 7/16	6-2022-855
						4	5 15/16	6-2416-855
3 1/2"	4 1/2	5 1/4	5 1/8	5.38	1 15/16	4 3/4	6 11/16	6-2419-855
						5 1/2	7 7/16	6-2422-855
						4	5 15/16	6-2416-855

Bore Sizes for Ball Bearing Bushings and Pin Assembly

Pin Diameter	-825, -835 Bore Diameter	-55 Bore Diameter	Ball Bushing Bore Diameter	Ring System Bore Diameter
1"	0.9991 0.9985	1.0006 1.0000	1.8756 1.8750	-
1 1/4"	1.2489 1.2482	1.2506 1.2500	2.1257 2.1250	-
1 1/2"	1.4989 1.4982	1.5006 1.5000	2.5007 2.5000	2.4997 2.4990
1 3/4"	1.7489 1.7482	1.7506 1.7500	2.7507 2.7500	2.7497 2.7490
2"	1.9989 1.9982	2.0007 2.0000	3.2509 3.2500	3.2499 3.2490
2 1/2"	2.4986 2.4979	2.5007 2.5000	3.7509 3.7500	3.7499 3.7490
3"	2.9986 2.9979	3.0007 3.0000	4.2509 4.2500	-

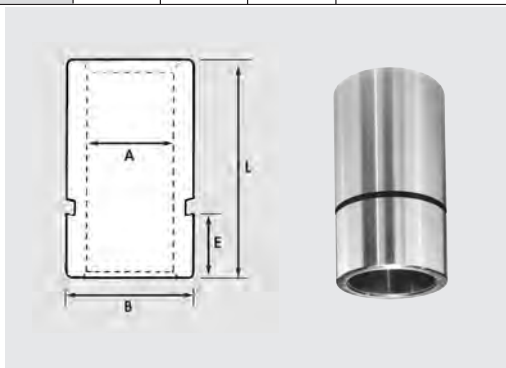


Demountable Pin Selection Guide (-835)

Nominal Pin Diameter O	Flange B	Length E	Length F	Catalog Number
1"	1.31	7/8"	4	5-0816-835
			4 1/2	5-0818-835
			5	5-0820-835
			5 1/2	5-0822-835
			6	5-0824-835
			6 1/2	5-0826-835
			7	5-0828-835
			7 1/2	5-0830-835
1 1/4"	1.56	1 3/16"	4	5-1016-835
			4 1/2	5-1018-835
			5	5-1020-835
			5 1/2	5-1022-835
			6	5-1024-835
			6 1/2	5-1026-835
			7	5-1028-835
			7 1/2	5-1030-835
			8	5-1032-835
			8 1/2	5-1034-835
1 1/2"	1.87	1 7/16"	9	5-1036-835
			9 1/2	5-1038-835
			10	5-1040-835
			5	5-1220-835
			5 1/2	5-1222-835
			6	5-1224-835
			6 1/2	5-1226-835
			7	5-1228-835
			7 1/2	5-1230-835
			8	5-1232-835
1 3/4"	2.25	1 11/16"	8 1/2	5-1234-835
			9	5-1236-835
			9 1/2	5-1238-835
			10	5-1240-835
			11	5-1244-835
			5	5-1420-835
			5 1/2	5-1422-835
			6	5-1424-835
			6 1/2	5-1426-835
			7	5-1428-835
2"	2.50	1 15/16"	7 1/2	5-1430-835
			8	5-1432-835
			8 1/2	5-1434-835
			9	5-1436-835
			9 1/2	5-1438-835
			10	5-1440-835
			11	5-1444-835
			12	5-1448-835
			5	5-1620-835
			5 1/2	5-1622-835
2 1/2"	3.00	1 15/16"	6	5-1624-835
			6 1/2	5-1626-835
			7	5-1628-835
			7 1/2	5-1630-835
			8	5-1632-835
			8 1/2	5-1634-835
			9	5-1636-835
			9 1/2	5-1638-835
			10	5-1640-835
			11	5-1644-835
3"	3.50	2 3/16"	12	5-1648-835
			5	5-2020-835
			5 1/2	5-2022-835
			6	5-2024-835
			6 1/2	5-2026-835
			7	5-2028-835
			7 1/2	5-2030-835
			8	5-2032-835
			8 1/2	5-2034-835
			9	5-2036-835
3 1/2"	4.00	2 3/16"	9 1/2	5-2038-835
			10	5-2040-835
			11	5-2044-835
			12	5-2048-835
			13	5-2052-835
			14	5-2056-835
			6	5-2424-835
			7	5-2428-835
			8	5-2432-835
			9	5-2436-835
4"	4.50	2 3/16"	10	5-2440-835
			11	5-2444-835
			12	5-2448-835
			14	5-2456-835
			16	5-2464-835



Ball Bearing Cage Selection Guide (-8225)



Diameter O	C	S	X	Catalog Number
1"	2	1 1/16	3/16	6-0808-8225
	2 1/2	1 5/16		6-0810-8225
	3	1 9/16		6-0812-8225
	3 1/4	1 13/16		6-0813-8225
	3 1/2	2 1/16		6-0814-8225
	3 3/4	2 5/16		6-0815-8225
1 1/4"	2 3/4	1 7/16	3/16	6-1011-8225
	3 1/4	1 11/16		6-1013-8225
	3 3/4	1 15/16		6-1015-8225
	4	2 3/16		6-1016-8225
1 1/2"	4 1/4	2 7/16	1/4	6-1017-8225
	4 3/4	2 15/16		6-1019-8225
	2 3/4	1 7/16	1/4	6-1211-8225
	3 1/2	1 13/16		6-1214-8225
1 3/4"	4 1/4	2 3/16		6-1217-8225
	4 1/2	2 7/16		6-1218-8225
	5	2 15/16		6-1220-8225
	5 1/2	3 7/16		6-1222-8225
2"	6	3 15/16	1/4	6-1224-8225
	3 1/4	1 11/16		6-1413-8225
	4	2 1/16		6-1416-8225
	4 3/4	2 7/16		6-1419-8225
2 1/2"	5 1/4	2 15/16	1/4	6-1421-8225
	5 3/4	3 7/16		6-1423-8225
	6 1/4	3 15/16		6-1425-8225
	6 3/4	4 7/16		6-1427-8225
3"	3 3/4	1 15/16	1/4	6-1615-8225
	4 1/2	2 5/16		6-1618-8225
	5 1/4	2 11/16		6-1621-8225
	5 5/8	3 1/16		6-1623-8225
3 1/2"	6	3 7/16	1/4	6-1624-8225
	6 1/2	3 15/16		6-1626-8225
	7	4 7/16		6-1628-8225
	7 1/2	4 15/16		6-1630-8225
4"	5 3/4	3	3/8	6-2023-8225
	6 1/2	3 3/8		6-2026-8225
	7 1/4	3 3/4		6-2029-8225
	7 3/4	4 1/4		6-2031-8225
4 1/2"	8 1/4	4 3/4	3/8	6-2033-8225
	8 3/4	5 1/4		6-2035-8225
	5 3/4	3	3/8	6-2423-8225
	6 1/2	3 3/8		6-2426-8225
5"	7 1/4	3 3/4		6-2429-8225
	7 1/2	3 3/4		6-2429-8225





Washer Assemblies

Nominal Pin Diameter O	Catalog Number
1"	6-0008-822
1 1/4"	6-0010-822
1 1/2"	6-0012-822
1 3/4"	6-0014-822
2"	6-0016-822
2 1/2"	6-0020-822
3"	6-0024-822

Washer Assemblies sold separately for ball bearing applications.

Straight Sleeve Bushing Selection Guide (-865)

Nominal Post Diameter O	A	B	E	Length L	Catalog Number
1"	1 3/8	1 7/8	n/a	2 1/2	6-0810-865
				3	6-0812-865
				3 1/2	6-0814-865
				4	6-0816-865
				4 1/2	6-0818-865
				5	6-0820-865
1 1/4"	1 5/8	2 1/8	n/a	3	6-1012-865
				3 1/2	6-1014-865
				4	6-1016-865
				4 1/2	6-1018-865
				5	6-1020-865
				6	6-1024-865
1 1/2"	1 7/8	2 1/2	1 3/8	3	6-1212-865
				3 3/4	6-1215-865
				4 1/2	6-1218-865
				5	6-1220-865
				5 1/2	6-1222-865
				6	6-1224-865
				7	6-1228-865
				8	6-1232-865
1 3/4"	2 1/8	2 3/4	1 5/8	3 1/2	6-1414-865
				4 1/4	6-1417-865
				5	6-1420-865
				5 1/2	6-1422-865
				6	6-1424-865
				7	6-1428-865
				8	6-1432-865
				9	6-1436-865
2"	2 1/2	3 1/4	1 7/8	4	6-1616-865
				4 3/4	6-1619-865
				5 1/2	6-1622-865
				6 1/4	6-1625-865
				7	6-1628-865
				8	6-1632-865
				9	6-1636-865
				10	6-1640-865
2 1/2"	3	3 3/4	1 7/8	6	6-2024-865
				6 3/4	6-2027-865
				7 1/2	6-2030-865
				8 1/2	6-2034-865
				9 1/2	6-2038-865
				10 1/2	6-2042-865

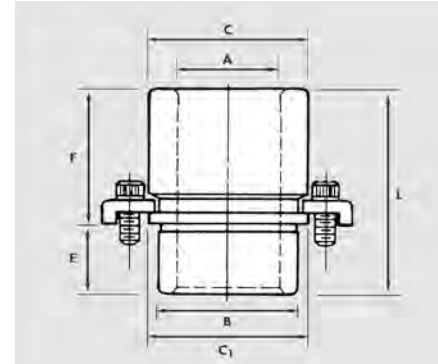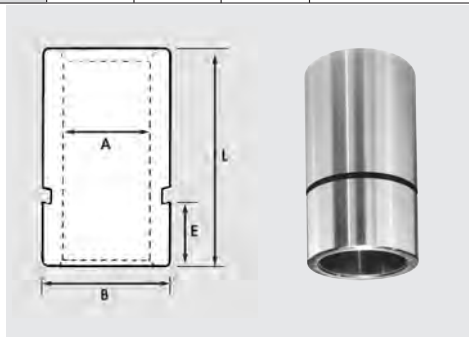

Demountable Bushing Selection Guide (-855)

Nominal Post Diameter O	A	B	C	C1	E	F	L	Catalog Number
1"	1 3/8	1 7/8	2 1/8	2.28	1 3/16	1 1/4	2 7/16	6-0805-855
						1 3/4	2 15/16	6-0807-855
						2 1/4	3 7/16	6-0809-855
1 1/4"	1 5/8	2 1/8	2 3/8	2.48	1 3/16	1 3/4	2 15/16	6-1007-855
						2 1/4	3 7/16	6-1009-855
						2 3/4	3 15/16	6-1011-855
1 1/2"	1 7/8	2 1/2	2 7/8	2.98	1 7/16	1 1/2	2 15/16	6-1206-855
						2 1/4	3 11/16	6-1209-855
						3	4 7/16	6-1212-855
						3 1/2	4 15/16	6-1214-855
1 3/4"	2 1/8	2 3/4	3 1/8	3.28	1 11/16	1 3/4	3 7/16	6-1407-855
						2 1/2	4 3/16	6-1410-855
						3 1/4	4 15/16	6-1413-855
2"	2 1/2	3 1/4	3 5/8	3.74	1 15/16	2	3 15/16	6-1608-855
						2 3/4	4 11/16	6-1611-855
						3 1/2	5 7/16	6-1614-855
						4 1/4	6 3/16	6-1617-855
2 1/2"	3	3 3/4	4 1/8	4.25	1 15/16	4	5 15/16	6-2016-855
						4 3/4	6 11/16	6-2019-855
						5 1/2	7 7/16	6-2022-855
3"	3 1/2	4 1/4	4 3/4	4.88	1 15/16	4	5 15/16	6-2416-855
						4 3/4	6 11/16	6-2419-855
						5 1/2	7 7/16	6-2422-855


Bore Sizes for Ball Bearing Bushing and Pin Assembly

Pin Diameter	-825, -835 Bore Diameter	-55 Bore Diameter	Ball Bushing Bore Diameter	Ring System Bore Diameter
1"	0.9991 0.9985	1.0006 1.0000	1.8756 1.8750	-
1 1/4"	1.2489 1.2482	1.2506 1.2500	2.1257 2.1250	-
1 1/2"	1.4989 1.4982	1.5006 1.5000	2.5007 2.5000	2.4997 2.4990
1 3/4"	1.7489 1.7482	1.7506 1.7500	2.7507 2.7500	2.7497 2.7490
2"	1.9989 1.9982	2.0007 2.0000	3.2509 3.2500	3.2499 3.2490
2 1/2"	2.4986 2.4979	2.5007 2.5000	3.7509 3.7500	3.7499 3.7490
3"	2.9986 2.9979	3.0007 3.0000	4.2509 4.2500	-

Selecting the Proper Operating Conditions

Type I

Continuous Preload

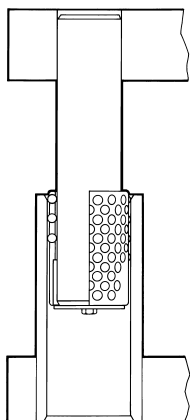


Type **I** is recommended for high speed, high production dies. Throughout the press stroke, all ball bearings remain in preloaded contact with the guide pin and bushing.

Please note that a Type **I** design may be run on a shorter stroke press, but not on a press whose stroke is longer than originally chosen.

Type IIa


Preload Partially Relieved

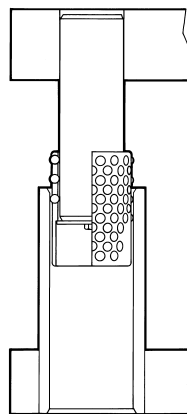

At top stroke, some ball bearings have left preload. On the down stroke they reengage the guide pin and bushing, producing a small upward force which helps counteract the natural tendency of the ball cage to creep downward.

Type IIb


Preload Relieved

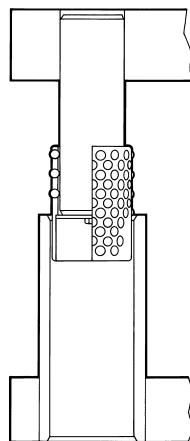

Type **IIb** is recommended if creeping is a problem. As soon as the last ball leaves preload on the up stroke, the cage repositions itself. This feature can eliminate a nagging maintenance chore.

Type III


Disengaged

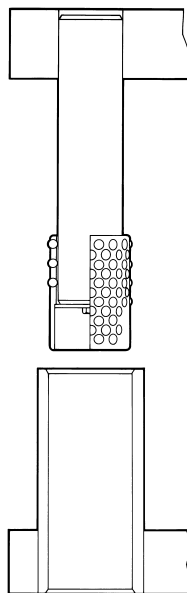

Type **III** permits an unlimited stroke. Also, if shorter bushings and cages can be used, Type **III** is economical.

However, a pinch point is created when the components disengage, so Type **III** should not be selected if it compromises safety.

Selecting the Correct Components

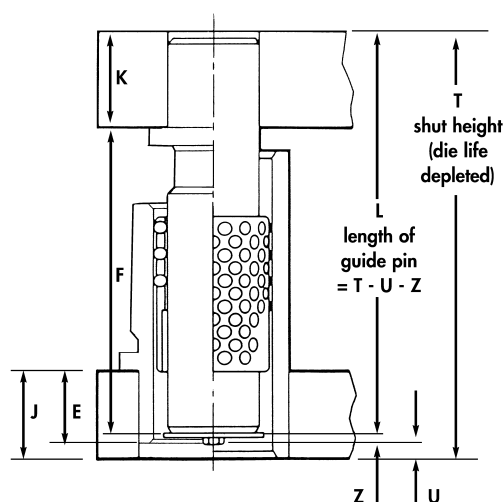

Guide Pins

1. Calculate **L** using one of the following formulas:

$$L = T - (U + Z) \text{ for assembly with sleeve bushings}$$

$$L = T - (U + Z) - J + E \text{ for demountable bushings}$$

2. For straight pins, select a length equal to **L**. If **L** is not a standard length, choose a longer pin and cut to **L**, or choose a shorter length and recess the pin in the punch holder to **L**, making sure that the minimum press fit length is at least equal to the pin diameter.
3. For demountable pins, select a length so that **K + F** is as close as possible to **L** without exceeding it.

Bushings

1. If the tool's working stroke is short and there are no off-center loads, select the shortest bushing which will produce the desired operating condition. Turn to the selection chart on pages 26 and 27, find the stroke, and read down that column until it intersects the operating condition you have selected. The bushing you need is listed on that line.
2. When rigidity and resistance to side load are required, use the selection chart to choose the longest bushing consistent with the desired operating condition.


CAUTION: Make sure the top of the bushing does not strike the punch holder or the demountable pin clamp screw, either when the die is new or die life is depleted. If it does, select the next shorter bushing.

Guide Pin Length Selection

Nominal Guide Pin Diameter O	Z	U + Z	E
1"	15/32		1 3/16
1 1/4"	15/32		1 3/16
1 1/2"	1/2		1 7/16
1 3/4"	1/2	3/4	1 11/16
2"	1/2		1 15/16
2 1/2"	9/16		1 15/16
3"	9/16		1 15/16

Above this line, balls are released from rolling engagement allowing cage to reposition.

Below this line, balls are in rolling engagement.

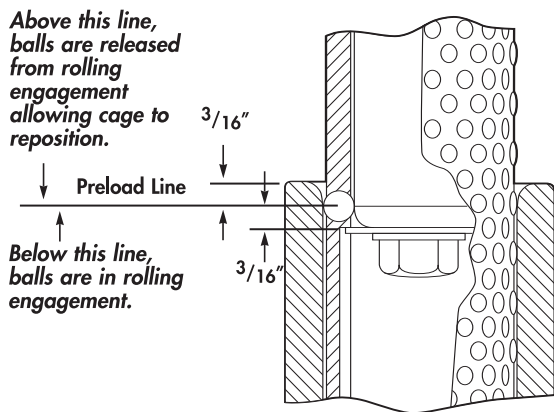


Cages

1. The page 26-27 selection chart automatically gives you the correct cage. It is listed on the same line as the bushing you have selected.
2. Different combinations of cages and bushings are possible, but then the selection chart does not apply. You will need to make a layout of the cage travel from the start of preload to bottom stroke. This figure gives you the position of the guide pin, bushing, and cage at the start of preload. From that point on, the cage travels half the distance of the guide pin.

Bushing and Ball Cage Operating Condition Selection Chart


Type I

Continuous Preload




Type IIa

Preload Partially Relieved





Type IIb

Preload Relieved



Type III

Disengaged

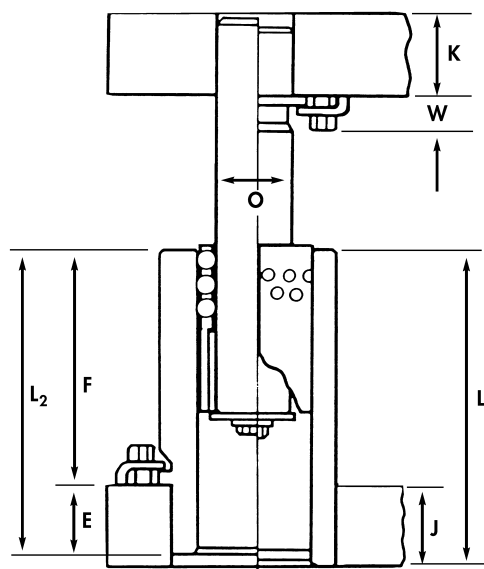

Caution: Be sure bushing does not strike punch holder or demountable pin clamping screw at minimum shut height. If this condition exists, use a shorter bushing and corresponding ball cage.

Nominal Pin Diameter O	Straight Sleeve L	Demountable Shoulder L ₂	
1"	2 1/2	2 7/16	
	3	2 15/16	
	3 1/2	3 7/16	
	4		
	4 1/2		
	5		
1 1/4"	3	2 15/16	
	3 1/2	3 7/16	
	4	3 15/16	
	4 1/2		
	5		
	6		
1 1/2"	3	2 15/16	
	3 3/4	3 11/16	
	4 1/2	4 7/16	
	5	4 15/16	
	6		
	7		
	8		
1 3/4"	3 1/2	3 7/16	
	4 1/4	4 3/16	
	5	4 15/16	
	6		
	7		
	8		
	9		
2"	4	3 15/16	
	4 3/4	4 11/16	
	5 1/2	5 7/16	
	6 1/4	6 3/16	
	7		
	8		
	9		
	10		
2 1/2"	6	5 15/16	
	6 3/4	6 11/16	
	7 1/2	7 7/16	
	8 1/2		
	9 1/2		
	10 1/2		
3"	-	5 15/16	
	-	6 11/16	
	-	7 7/16	

Ball Cage C	Clamp Screw W	Stroke "S" at minimum shut height (die life depleted)															
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
2	5/8																
2 1/2																	
3																	
3 1/4																	
3 1/2																	
3 3/4																	
2 3/4	3/4																
3 1/4																	
3 3/4																	
4																	
4 1/4																	
4 3/4																	
2 3/4	3/4																
3 1/2																	
4 1/4																	
4 1/2																	
5																	
5 1/2																	
6																	
3 1/4	3/4																
4																	
4 3/4																	
5 1/4																	
5 3/4																	
6 1/4																	
6 3/4																	
3 3/4	3/4																
4 1/2																	
5 1/4																	
5 5/8																	
6																	
6 1/2																	
7																	
7 1/2																	
5 3/4	3/4																
6 1/2																	
7 1/4																	
7 3/4																	
8 1/4																	
8 3/4																	
5 3/4	3/4																
6 1/2																	
7 1/4																	

**METRIC Plain Bearing
Components**

Precision Guide Pins..... 30

Demountable Pins..... 30

**Demountable Sintered
Bronze Bushings..... 31**

**Demountable Steel
Bushings..... 31**

**METRIC Ball Bearing
Components**

Precision Guide Pins..... 32

Ball Bearing Cages..... 32

Stripper Plate Cages 33

Straight Sleeve Bushings..... 33

Demountable Bushings..... 33

Demountable Pins..... 34

Selecting Components 36

Type I Selection Chart 37

**Selecting Type II
Components 38**

Type II Selection Chart..... 39

READY Metric Plain Bearing and Ball Bearing Components

The following 11 pages represent our extensive line of metric guide components, which have been used by European toolmakers and stamping plants for over 30 years.


Our design is elegantly simple. All of our guide pillars, press fit and demountable, fit an R6 bored hole. All our bushings, ball bearing and plain bearing, straight and demountable, fit an H6 bored hole:

As with our line of inch components, each Ready metric pillar can be used either as a plain bearing or ball bearing pin. Every pin and bushing is color coded for Selective Fit™, providing you with the correct running clearance for your application.

Metric Hole Boring Chart

Pin Diameter O	Pin R6 Bore	Standard Bushing H6 Bore	Ball Bushing H6 Bore
19	<u>18.976</u> 18.963	<u>28.016</u> 28.000	-
25	<u>24.976</u> 24.963	<u>38.016</u> 38.000	<u>45.016</u> 45.000
32	<u>31.971</u> 31.955	<u>45.016</u> 45.000	<u>54.019</u> 54.000
40	<u>39.971</u> 39.955	<u>54.019</u> 54.000	<u>65.019</u> 65.000
50	<u>49.971</u> 49.955	<u>65.019</u> 65.000	<u>81.022</u> 81.000
63	<u>62.965</u> 62.946	<u>81.022</u> 81.000	<u>95.022</u> 95.000
80	<u>79.963</u> 79.944	<u>100.022</u> 100.000	<u>112.022</u> 112.000


Metric Clamp Data

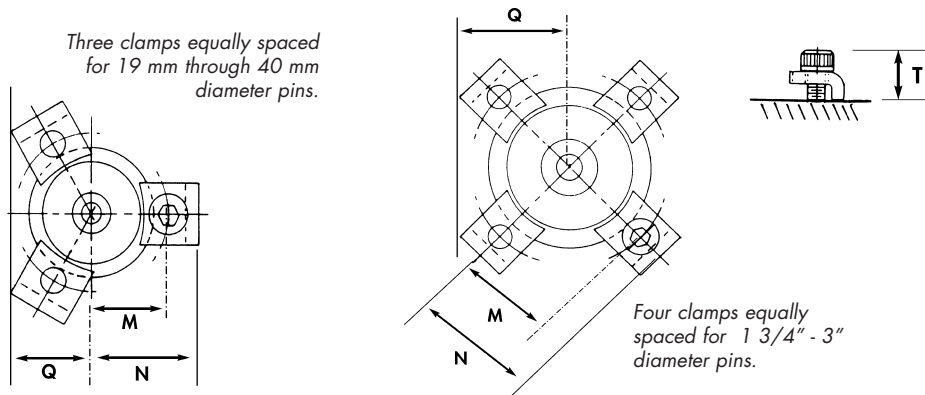

Diameter O	DEMOUNTABLE PIN						
	Radius		Q	Qty per Pillar	Clamp	Socket Head Cap Screws	
	M	N				S	T
19	16	23.5	19	3	6-90-1	M 6 x 18	15
25	20.3	27.8	20.8	3	6-93-1	M 8 x 22	19.4
32	25.5	35.5	24.6	3	6-93-1	M 8 x 22	19.4
40	30	40	26.9	3	6-93-1	M 8 x 22	19.4
50	36.5	46.5	38.5	4	6-93-1	M 8 x 22	19.4
63	42.5	52.5	42.7	4	6-93-1	M 8 x 22	19.4
80	51	61	48.8	4	6-93-1	M 8 x 22	19.4

Metric Clamp Data (cont.)


Pin Diameter O	Pillar Retaining Plug								
	D1	min. L	min. H	A	B	D2	D3	Catalog Number	Screw
19	26	3.5	26	3.3	4.2	18	25	6-18-3	M 5 x 16
25	33	5.5	30	5	4.2	24	32	6-24-3	M 6 x 20
32	41	5.5	39	5	7	30	40	6-30-3	M 8 x 25
40	51	5.5	49	5	10	40	50	6-40-3	M 10 x 30
50	64	5.5	60	5	13	50	63	6-50-3	M 12 x 40
63	77	5.5	70	5	19	63	76	6-63-3	M 16 x 40
80	94	5.5	87	5	25	80	93	6-80-3	M 20 x 50

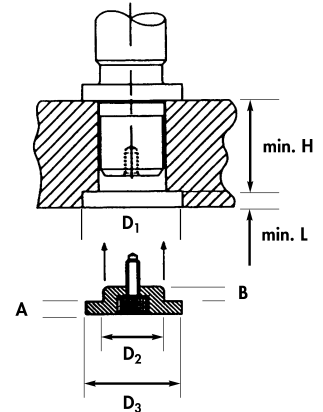


Extra Long, Long and Short Shoulder Bushings

Pillar Dia.	Clamps per Bush	Screw	Clamp number	A mm	B mm	C mm	D mm	M mm	N mm
19	2	M6	6-95-1	12.3	12.7	3.2	5.6	19.5	25.5
25	3	M6	6-90-1	14.3	15.9	4.9	8.7	27.5	35
32	3	M8	6-93-1	19.8	15.9	6.5	11.4	32.5	42.5
40	3	M8	6-93-1	19.8	15.9	6.5	11.4	37	47
50	4	M8	6-93-1	19.8	15.9	6.5	11.4	44.5	54.5
63	4	M8	6-93-1	19.8	15.9	6.5	11.4	52	62
80	4	M8	6-93-1	19.8	15.9	6.5	11.4	62	72

Clamp Numbers:
6-90-1, 6-93-1, 6-95-1

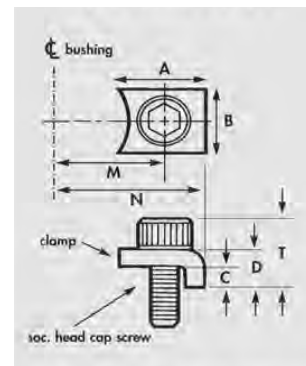

Clamp Numbers:
6-96-1, 6-97-1

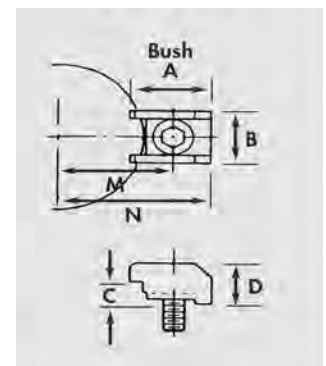

Low Profile Bushings

Pillar Dia.	Clamps per Bush	Screw	Clamp number	A mm	B mm	C mm	D mm	M mm	N mm
19	2	M6	6-95-1	12.3	12.7	3.2	5.6	19.5	25.5
25	3	M6	6-96-1	17.5	14.5	5	10	30	37
32	3	M6	6-96-1	17.5	14.5	5	10	34	41
40	3	M8	6-97-1	24.6	18.9	7.9	13	39.5	50.5
50	4	M8	6-97-1	24.6	18.9	7.9	13	46	57
63	4	M8	6-97-1	24.6	18.9	7.9	13	56	67.5
80	4	M8	6-97-1	24.6	18.9	7.9	13	66	77

Ball Bearing Stripper Plate Bushings

Pillar Dia.	Clamps per Bush	Screw	Clamp number	A mm	B mm	C mm	D mm	M mm	N mm
25	3	M6	6-96-1	17.5	14.5	5	10	32.5	39.5
32	3	M6	6-96-1	17.5	14.5	5	10	37	44
40	4	M6	6-96-1	17.5	14.5	5	10	44.5	51.5
50	4	M6	6-96-1	17.5	14.5	5	10	52.5	59.5

Nominal Diameter	DEMOUNTABLE BALL BEARING BUSHINGS									
	Radius		Size				Clamp No.	Per Unit	Screw size	T
	M	N	A	B	C	D				
25	32.5	43	19.8	15.9	6.5	11.4	6-93-1	3	M8 X 20	19.4
32	37	47								
40	43.5	54								
50	52.5	63								
63	59.5	70								


Precision Pin Selection Guide

Nominal Pin Diameter O	Length L	Catalog Number
19	100	5-1910-82
	110	5-1911-82
	120	5-1912-82
	130	5-1913-82
	140	5-1914-82
	150	5-1915-82
	160	5-1916-82
	170	5-1917-82
	180	5-1918-82
	190	5-1919-82
	200	5-2120-82
25	100	5-2510-82
	110	5-2511-82
	120	5-2512-82
	130	5-2513-82
	140	5-2514-82
	150	5-2515-82
	160	5-2516-82
	170	5-2517-82
	180	5-2518-82
	190	5-2519-82
	200	5-2520-82
	220	5-2522-82
	240	5-2524-82
	260	5-2526-82
	280	5-2528-82
32	130	5-3213-82
	140	5-3214-82
	150	5-3215-82
	160	5-3216-82
	170	5-3217-82
	180	5-3218-82
	190	5-3219-82
	200	5-3220-82
	220	5-3222-82
	240	5-3224-82
	260	5-3226-82
	280	5-3228-82
	320	5-3232-82

Nominal Pin Diameter O	Length L	Catalog Number
40	130	5-4013-82
	140	5-4014-82
	150	5-4015-82
	160	5-4016-82
	170	5-4017-82
	180	5-4018-82
	190	5-4019-82
	200	5-4020-82
	220	5-4022-82
	240	5-4024-82
50	260	5-4026-82
	280	5-4028-82
	320	5-4032-82
	360	5-4036-82
	160	5-5016-82
	180	5-5018-82
	200	5-5020-82
	220	5-5022-82
	240	5-5024-82
	260	5-5026-82
63	280	5-5028-82
	320	5-5032-82
	330	5-5033-82
	360	5-5036-82
	400	5-5040-82
	450	5-5045-82
	200	5-6320-82
	220	5-6322-82
	240	5-6324-82
	260	5-6326-82
80	280	5-6328-82
	320	5-6332-82
	360	5-6336-82
	400	5-6340-82
	450	5-6345-82
	500	5-6350-82
	240	5-8024-82
	260	5-8026-82
	280	5-8028-82
	320	5-8032-82
	360	5-8036-82
	400	5-8040-82
	450	5-8045-82
	500	5-8050-82

Demountable Pin Selection Guide


O	B	E	Length F	Catalog Number
19	25.6	20	70	5-1907-83
			80	5-1908-83
			90	5-1909-83
			100	5-1910-83
			110	5-1911-83
			120	5-1912-83
			130	5-1913-83
			140	5-1914-83
			150	5-1915-83
			160	5-1916-83
25	32.6	24	70	5-2507-83
			80	5-2508-83
			90	5-2509-83
			100	5-2510-83
			110	5-2511-83
			120	5-2512-83
			130	5-2513-83
			140	5-2514-83
			150	5-2515-83
			160	5-2516-83
			170	5-2517-83
			180	5-2518-83
			200	5-2520-83
			32	40.6
100	5-3210-83			
110	5-3211-83			
120	5-3212-83			
130	5-3213-83			
140	5-3214-83			
150	5-3215-83			
160	5-3216-83			
170	5-3217-83			
180	5-3218-83			
200	5-3220-83			
220	5-3222-83			
240	5-3224-83			
280	5-3228-83			
40	50.8	37	100	5-4010-83
			110	5-4011-83
			120	5-4012-83
			130	5-4013-83
			140	5-4014-83
			150	5-4015-83
			160	5-4016-83
			170	5-4017-83
			180	5-4018-83
			200	5-4020-83
			220	5-4022-83
			240	5-4024-83
			280	5-4028-83




Guide Pin Tap Sizes		Recommended Seating Torque
Nominal Pin Diameter O	Tap Size	Kg-M
25 - 32	M6	0.90
40 - 80	M10	4.40

Demountable Pin Selection Guide Continued

O	B	E	Length F	Catalog Number
50	63.8	45	110	5-5011-83
			120	5-5012-83
			130	5-5013-83
			140	5-5014-83
			150	5-5015-83
			160	5-5016-83
			170	5-5017-83
			180	5-5018-83
			200	5-5020-83
			220	5-5022-83
			240	5-5024-83
			260	5-5026-83
			280	5-5028-83
			320	5-5032-83
			360	5-5036-83
			400	5-5040-83
63	76	49	120	5-6312-83
			140	5-6314-83
			160	5-6316-83
			180	5-6318-83
			200	5-6320-83
			220	5-6322-83
			240	5-6324-83
			280	5-6328-83
			320	5-6332-83
			360	5-6336-83
80	93	60	180	5-8018-83
			200	5-8020-83
			220	5-8022-83
			240	5-8024-83
			280	5-8028-83
			320	5-8032-83
			360	5-8036-83
			400	5-8040-83

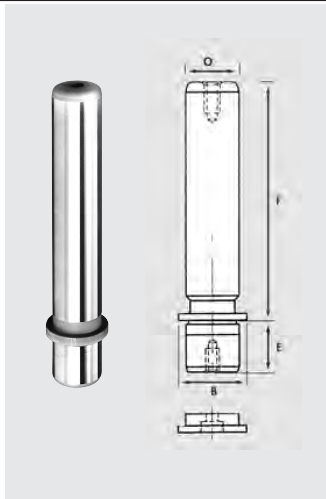

Demountable Steel Bushings and Sintered Bronze Bushings



Low Profile Bushings

D ₁ mm	D ₂ mm	D ₃ mm	D ₄ mm	E mm	F mm	L mm	X mm	Steel Catalog Number	Sintered Bronze Catalog Number
19	28	28	32.5	18	10	28	6	6-1928-68	6-1928-48
25	38	36	47	23	10	33	6	6-2538-68	6-2538-48
32	45	43	54	30	10	40	10	6-3245-68	6-3245-48
40	54	48	63	38	14	52	10	6-4054-68	6-4054-48
50	65	64	75	48	14	62	20	6-5065-68	6-5065-48
63	81	79	93	61	14	75	20	6-6381-68	6-6381-48
80	100	99	115	78	14	92	32	6-8010-68	6-8010-48



Short Shoulder Bushings

D ₁ mm	D ₂ mm	D ₃ mm	D ₄ mm	E mm	F mm	L mm	Steel Catalog Number	Sintered Bronze Catalog Number
19	28	28.5	32.5	18	16	34	6-1928-63	6-1928-43
25	38	44	47	23	21	44	6-2538-63	6-2538-43
32	45	51	54	25	21	48	6-3245-63	6-3245-43
40	54	60	63	30	21	51	6-4054-63	6-4054-43
50	65	73	75	35	25	60	6-5065-63	6-5065-43
63	81	90	93	48	27	75	6-6381-63	6-6381-43
80	100	110	115	48	27	75	6-8010-63	6-8010-43



Standard Shoulder Bushings

D ₁ mm	D ₂ mm	D ₃ mm	D ₄ mm	E mm	F mm	L mm	Steel Catalog Number	Sintered Bronze Catalog Number
19	28	28.5	32.5	18	32	50	6-1928-64	6-1928-44
25	38	44	47	23	47	70	6-2538-64	6-2538-44
32	45	51	54	25	50	75	6-3245-64	6-3245-44
40	54	60	63	30	50	80	6-4054-64	6-4054-44
50	65	73	75	35	50	85	6-5065-64	6-5065-44
63	81	90	93	48	52	100	6-6381-64	6-6381-44
80	100	110	115	48	52	100	6-8010-64	6-8010-44



Extra Long Shoulder Bushings


D ₁ mm	D ₂ mm	D ₃ mm	D ₄ mm	E mm	F mm	L mm	Steel Catalog Number	Sintered Bronze Catalog Number
25	38	44	47	23	75	98	6-2538-65	6-2538-45
32	45	51	54	25	75	100	6-3245-65	6-3245-45
40	54	60	63	30	85	115	6-4054-65	6-4054-45
50	65	73	75	35	100	135	6-5065-65	6-5065-45
63	81	90	93	48	100	148	6-6381-65	6-6381-45



Please Note: The Demountable Clamp Data is located on page 29.

Precision Pin Selection Guide

Nominal Pin Diameter O	Length L	Catalog Number	Nominal Pin Diameter O	Length L	Catalog Number
19	100	5-1910-82	40	130	5-4013-82
	110	5-1911-82		140	5-4014-82
	120	5-1912-82		150	5-4015-82
	130	5-1913-82		160	5-4016-82
	140	5-1914-82		170	5-4017-82
	150	5-1915-82		180	5-4018-82
	160	5-1916-82		190	5-4019-82
	170	5-1917-82		200	5-4020-82
	180	5-1918-82		220	5-4022-82
	190	5-1919-82		240	5-4024-82
25	200	5-2120-82		260	5-4026-82
	100	5-2510-82		280	5-4028-82
	110	5-2511-82		320	5-4032-82
	120	5-2512-82		360	5-4036-82
	130	5-2513-82	50	160	5-5016-82
	140	5-2514-82		180	5-5018-82
	150	5-2515-82		200	5-5020-82
	160	5-2516-82		220	5-5022-82
	170	5-2517-82		240	5-5024-82
	180	5-2518-82		260	5-5026-82
	190	5-2519-82		280	5-5028-82
	200	5-2520-82		320	5-5032-82
	220	5-2522-82		330	5-5033-82
	240	5-2524-82		360	5-5036-82
	260	5-2526-82		400	5-5040-82
	280	5-2528-82		450	5-5045-82
32	130	5-3213-82	63	200	5-6320-82
	140	5-3214-82		220	5-6322-82
	150	5-3215-82		240	5-6324-82
	160	5-3216-82		260	5-6326-82
	170	5-3217-82		280	5-6328-82
	180	5-3218-82		320	5-6332-82
	190	5-3219-82		360	5-6336-82
	200	5-3220-82		400	5-6340-82
	220	5-3222-82		450	5-6345-82
	240	5-3224-82		500	5-6350-82
	260	5-3226-82	80	240	5-8024-82
	280	5-3228-82		260	5-8026-82
	320	5-3232-82		280	5-8028-82
				320	5-8032-82
				360	5-8036-82
				400	5-8040-82
				450	5-8045-82
				500	5-8050-82

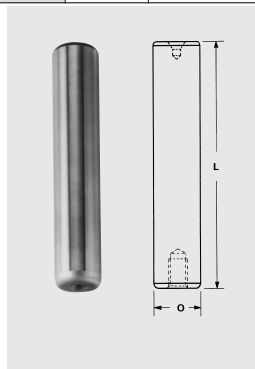



Ball Bearing Cage Selection Guide

Nominal Pillar Diameter D mm	Type I		Catalog Number	Nominal Pillar Diameter D mm	C mm	Type II		Catalog Number
	C mm	S mm				S mm	X mm	
25	36	11.5	6-2503-81	25	55	31	4.2	6-2505-82
	48	17.5	6-2504-81		70	40		6-2507-82
32	36	11.5	6-3203-81		90	47		6-2509-82
	48	17.5	6-3204-81		100	55		6-2510-82
40	48	17.5	6-4004-81		110	65		6-2511-82
	50	23.5	6-4006-81	32	70	40	4.2	6-3207-82
50	70	28.5	6-5007-81		90	47		6-3209-82
	84	35.5	6-5008-81		105	55		6-3210-82
	63	98	42.5		6-6309-81	115		65
80	98	42.5	6-8009-81		125	75		6-3212-82
				135	85	6-3213-82		

Type I


40	70	40	5.8	6-4007-82
	85	48		6-4008-82
	105	55		6-4010-82
	115	65		6-4011-82
	125	75		6-4012-82
50	135	85	7.0	6-4013-82
	145	98		6-4014-82
	155	107		6-4015-82
	105	58		6-5010-82
	120	65		6-5012-82
63	140	75	7.0	6-5014-82
	150	85		6-5015-82
	160	95		6-5016-82
	170	108		6-5017-82
	185	121		6-5018-82
80	195	133	8.5	6-5019-82
	145	76		6-6314-82
	165	86		6-6316-82
	180	96		6-6318-82
	190	107		6-6319-82
80	205	121	8.5	6-6320-82
	215	132		6-6321-82
	145	76		6-8014-82
	165	86		6-8016-82
	180	96		6-8018-82
80	190	107	8.5	6-8019-82
	205	121		6-8020-82
	215	132		6-8021-82

Type II



Washer Assemblies


Pin Diameter mm	Ball Cage		Screw Size
	Type I	Type II	
25	6-2500-81	6-2500-82	M6
32	6-3200-81	6-3200-82	M6
40	6-4000-81	6-4000-82	M10
50	6-5000-81	6-5000-82	M10
63	6-6300-81	6-6300-82	M10
80	6-8000-81	6-8000-82	M10

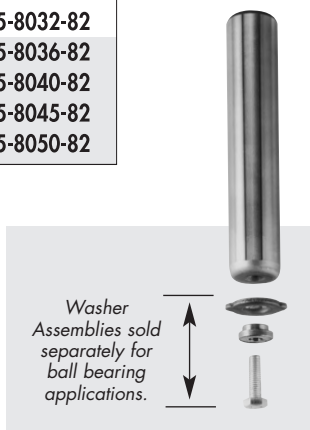

Straight Sleeve Bushing Selection Guide




Nominal Pillar Diameter mm	I. D.	O. D.	Length	Catalog Number
	A mm	B mm	L mm	
25	33	45	65	6-2506-86
			80	6-2508-86
			95	6-2509-86
			110	6-2511-86
			130	6-2513-86
32	40	54	80	6-3208-86
			95	6-3209-86
			110	6-3211-86
			130	6-3213-86
			150	6-3215-86
40	48	65	170	6-3217-86
			80	6-4008-86
			95	6-4009-86
			110	6-4011-86
			130	6-4013-86
			150	6-4015-86
			170	6-4017-86
50	62	81	190	6-4019-86
			215	6-4021-86
			110	6-5011-86
			130	6-5013-86
			150	6-5015-86
			170	6-5017-86
			190	6-5019-86
63	75	95	215	6-5021-86
			240	6-5024-86
			265	6-5026-86
			150	6-6315-86
			170	6-6317-86
			190	6-6319-86
80	92	112	215	6-6321-86
			240	6-6324-86
			265	6-6326-86
			150	6-8015-86
			170	6-8017-86
			190	6-8019-86
			215	6-8021-86
			240	6-8024-86
			265	6-8026-86

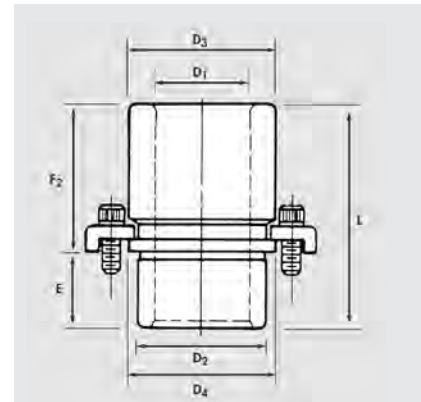

Demountable Bushing Selection Guide

Nominal Post Diameter D	D ₁ mm	D ₂ mm	D ₃ mm	D ₄ mm	E mm	F ₂ mm	L mm	Catalog Number
25	33	45	50	54	30	35	65	6-2503-85
						50	80	6-2505-85
						65	95	6-2506-85
32	40	54	59	63	30	50	80	6-3205-85
						65	95	6-3206-85
						80	110	6-3208-85
40	48	65	73	75	30	50	80	6-4005-85
						65	95	6-4006-85
						80	110	6-4008-85
						100	130	6-4010-85
50	62	81	91	91	50	60	110	6-5006-85
						80	130	6-5008-85
						100	150	6-5010-85
						120	170	6-5012-85
63	75	95	105	105	50	100	150	6-6310-85
						120	170	6-6312-85
						140	190	6-6314-85

Stripper Plate Bushing and Cage Selection Guide

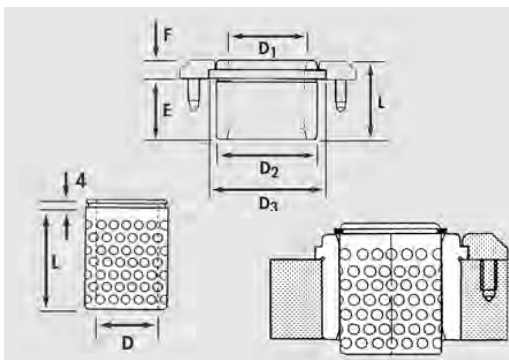

D mm	D ₁ mm	D ₂ mm	D ₃ mm	E mm	F mm	L mm	Bushing Catalog Number	L mm	Cage + Catalog Number
25	33	45	51	20	10	30	6-2520-87	40	6-2504-83
				25		35	6-2525-87	52	6-2505-83
32	40	54	60	20	10	30	6-3220-87	40	6-3204-83
				25		35	6-3225-87	52	6-3205-83
				32		42	6-3232-87		
40	48	65	75	29	10	39	6-4029-87	52	6-4005-83
				36		46	6-4036-87	64	6-4006-83
				44		54	6-4044-87		
50	62	81	91	36	10	46	6-5036-87	74	6-5007-83
				44		54	6-5044-87	88	6-5008-83
63	75	95	105	50	10	60	6-6350-87	98	6-6309-83

Demountable Pin Selection Guide

O	B	E	Length F	Catalog Number
19	25.6	20	70	5-1907-83
			80	5-1908-83
			90	5-1909-83
			100	5-1910-83
			110	5-1911-83
			120	5-1912-83
			130	5-1913-83
			140	5-1914-83
			150	5-1915-83
			160	5-1916-83
25	32.6	24	70	5-2507-83
			80	5-2508-83
			90	5-2509-83
			100	5-2510-83
			110	5-2511-83
			120	5-2512-83
			130	5-2513-83
			140	5-2514-83
			150	5-2515-83
			160	5-2516-83
32	40.6	30	170	5-2517-83
			180	5-2518-83
			200	5-2520-83
			90	5-3209-83
			100	5-3210-83
			110	5-3211-83
			120	5-3212-83
			130	5-3213-83
			140	5-3214-83
			150	5-3215-83
40	50.8	37	160	5-3216-83
			170	5-3217-83
			180	5-3218-83
			200	5-3220-83
			220	5-3222-83
			240	5-3224-83
			280	5-3228-83
			100	5-4010-83
			110	5-4011-83
			120	5-4012-83
			130	5-4013-83
			140	5-4014-83
			150	5-4015-83
			160	5-4016-83
			170	5-4017-83
			180	5-4018-83
			200	5-4020-83
			220	5-4022-83
			240	5-4024-83
			280	5-4028-83

O	B	E	Length F	Catalog Number
50	63.8	45	110	5-5011-83
			120	5-5012-83
			130	5-5013-83
			140	5-5014-83
			150	5-5015-83
			160	5-5016-83
			170	5-5017-83
			180	5-5018-83
			200	5-5020-83
			220	5-5022-83
63	76	49	240	5-5024-83
			260	5-5026-83
			280	5-5028-83
			320	5-5032-83
			360	5-5036-83
			400	5-5040-83
			120	5-6312-83
			140	5-6314-83
			160	5-6316-83
			180	5-6318-83
80	93	60	200	5-6320-83
			220	5-6322-83
			240	5-6324-83
			280	5-6328-83
			320	5-6332-83
			360	5-6336-83
			400	5-6340-83
			180	5-8018-83
			200	5-8020-83
			220	5-8022-83
			240	5-8024-83
			280	5-8028-83
			320	5-8032-83
			360	5-8036-83
			400	5-8040-83

Ball Bearing Cage
Selection Guide

Type I

Nominal Pillar Diameter D mm	Type I		Catalog Number
	C mm	S mm	
25	36	11.5	6-2503-81
	48	17.5	6-2504-81
32	36	11.5	6-3203-81
	48	17.5	6-3204-81
40	48	17.5	6-4004-81
	50	23.5	6-4006-81
50	70	28.5	6-5007-81
	84	35.5	6-5008-81
63	98	42.5	6-6309-81
80	98	42.5	6-8009-81

Nominal Pillar Diameter D mm	Type II			Catalog Number
	C mm	S mm	X mm	
25	55	31	4.2	6-2505-82
	70	40		6-2507-82
	90	47		6-2509-82
	100	55		6-2510-82
	110	65		6-2511-82
32	70	40	4.2	6-3207-82
	90	47		6-3209-82
	105	55		6-3210-82
	115	65		6-3211-82
	125	75		6-3212-82
40	135	85	5.8	6-3213-82
	70	40		6-4007-82
	85	48		6-4008-82
	105	55		6-4010-82
	115	65		6-4011-82
50	125	75	7.0	6-4012-82
	135	85		6-4013-82
	145	98		6-4014-82
	155	107		6-4015-82
63	105	58	7.0	6-5010-82
	120	65		6-5012-82
	140	75		6-5014-82
	150	85		6-5015-82
	160	95		6-5016-82
80	170	108	8.5	6-5017-82
	185	121		6-5018-82
	195	133		6-5019-82
	145	76		6-6314-82
	165	86		6-6316-82
63	180	96	7.0	6-6318-82
	190	107		6-6319-82
	205	121		6-6320-82
	215	132		6-6321-82
80	145	76	8.5	6-8014-82
	165	86		6-8016-82
	180	96		6-8018-82
	190	107		6-8019-82
	205	121		6-8020-82
	215	132		6-8021-82


Washer Assemblies

Pin Diameter mm	Ball Cage		Screw Size
	Type I	Type II	
25	6-2500-81	6-2500-82	M6
32	6-3200-81	6-3200-82	M6
40	6-4000-81	6-4000-82	M10
50	6-5000-81	6-5000-82	M10
63	6-6300-81	6-6300-82	M10
80	6-8000-81	6-8000-82	M10


Washer
Assemblies sold
separately for
ball bearing
applications.



Straight Sleeve Bushing Selection Guide

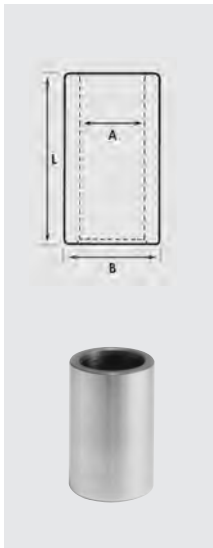


Nominal Pillar Diameter mm	I. D. A mm	O. D. B mm	Length L mm	Catalog Number
25	33	45	65	6-2506-86
			80	6-2508-86
			95	6-2509-86
			110	6-2511-86
			130	6-2513-86
32	40	54	80	6-3208-86
			95	6-3209-86
			110	6-3211-86
			130	6-3213-86
			150	6-3215-86
40	48	65	170	6-3217-86
			80	6-4008-86
			95	6-4009-86
			110	6-4011-86
			130	6-4013-86
50	62	81	150	6-4015-86
			170	6-4017-86
			190	6-4019-86
			215	6-4021-86
			110	6-5011-86
63	75	95	130	6-5013-86
			150	6-5015-86
			170	6-5017-86
			190	6-5019-86
			215	6-5021-86
80	92	112	240	6-5024-86
			265	6-5026-86
			150	6-6315-86
			170	6-6317-86
			190	6-6319-86
			215	6-6321-86
			240	6-6324-86
			265	6-6326-86
			150	6-8015-86
			170	6-8017-86
			190	6-8019-86
			215	6-8021-86
			240	6-8024-86
			265	6-8026-86

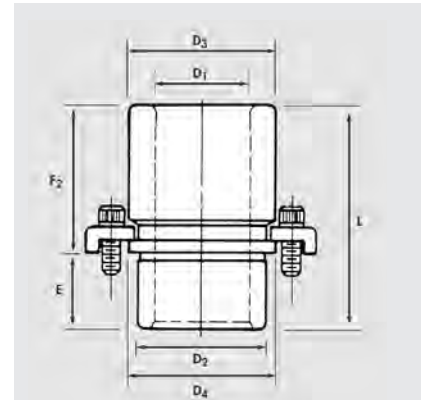

Demountable Bushing Selection Guide


Nominal Post Diameter D	D ₁ mm	D ₂ mm	D ₃ mm	D ₄ mm	E mm	F ₂ mm	L mm	Catalog Number
25	33	45	50	54	30	35	65	6-2503-85
						50	80	6-2505-85
						65	95	6-2506-85
32	40	54	59	63	30	50	80	6-3205-85
						65	95	6-3206-85
						80	110	6-3208-85
40	48	65	73	75	30	50	80	6-4005-85
						65	95	6-4006-85
						80	110	6-4008-85
						100	130	6-4010-85
50	62	81	91	91	50	60	110	6-5006-85
						80	130	6-5008-85
						100	150	6-5010-85
						120	170	6-5012-85
63	75	95	105	105	50	100	150	6-6310-85
						120	170	6-6312-85
						140	190	6-6314-85

Stripper Plate Bushing and Cage Selection Guide

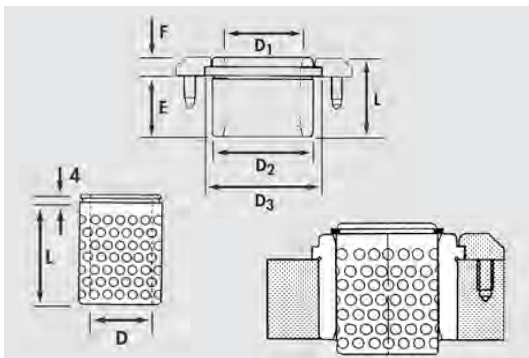

D mm	D ₁ mm	D ₂ mm	D ₃ mm	E mm	F mm	L mm	Bushing Catalog Number	L mm	Cage Catalog Number
25	33	45	51	20	10	30	6-2520-87	40	6-2504-83
				25	10	35	6-2525-87	52	6-2505-83
32	40	54	60	20	10	30	6-3220-87	40	6-3204-83
				25	10	35	6-3225-87	52	6-3205-83
				32	10	42	6-3232-87		
40	48	65	75	29	10	39	6-4029-87	52	6-4005-83
				36	10	46	6-4036-87	64	6-4006-83
				44	10	54	6-4044-87		
50	62	81	91	36	10	46	6-5036-87	74	6-5007-83
				44	10	54	6-5044-87	88	6-5008-83
63	75	95	105	50	10	60	6-6350-87	98	6-6309-83

Selecting Components

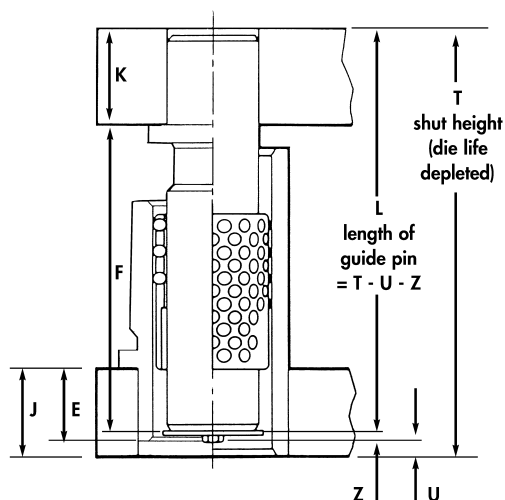

Guide Pins

1. Calculate **L** using one of the following formulas:

$$L = T - (U + Z) \text{ for assembly with sleeve bushings}$$

$$L = T - (U + Z) - J + E \text{ for demountable bushings}$$

2. For straight pins, select a length equal to **L**. If **L** is not a standard length, choose a longer pin and cut to **L**, or choose a shorter length and recess the pin in the punch holder to **L**, making sure that the minimum press fit length is at least equal to the pin diameter.
3. For demountable pins, select a length so that **K + F** is as close as possible to **L** without exceeding it.

Guide Pin Length Selection

Nominal Guide Pin Diameter O	Type I Cages		Type II Cages		E
	U	Z	U	Z	
25	3	7	3.5	10.5	30
32	3	7	3.5	10.5	30
40	3	9.5	4	13	30
50	3	9.5	4	13	50
63	3	9.5	4	13	50
80	3	9.5	4	13	--


Bushings

1. If the tool's working stroke is short and there are no off-center loads, choose the shortest bushing. Find the stroke in the selection chart and read down that column until it intersects the color bar. The bushing you need is listed on that line.
2. If rigidity and resistance to side load are required, choose the longest bushing. Check that the top of the bushing will not hit the underside of the punch holder (or clamping screw in the case of demountable pins) at minimum shut height.

CAUTION: Make sure the top of the bushing does not strike the punch holder or the demountable pin clamp screw, either when the die is new or die life is depleted. If it does, select the next shorter bushing.

Cages

1. For Type I cages, choose the length whose color code in the adjacent selection chart matches that of the bushing you have selected.
2. For Type II cages, the selection chart on page 39 automatically gives you the correct cage. It is listed on the same line as the bushing you have selected.

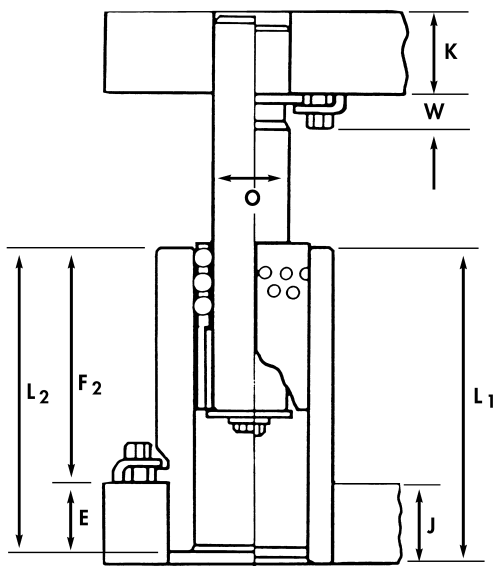

Type I Cages


Nominal Pin Diameter O	Demountable Bushing			Straight Sleeve L ₁	Ball Cage C	Stroke "S" at maximum shut height (new dies)											Die Life X
	F ₂	E	L ₂			20	40	60	80	100	120	140	160				
25	35	30	65	65	36											10	
	50	30	80	80													
	65	30	95	95													
				110													
				130	48												
32	50	30	80	80	36											10	
	65	30	95	95													
	80	30	110	110													
				130													
				150	48												
				170													
40	50	30	80	80	48											10	
	65	30	95	95													
	80	30	110	110													
	100	30	130	130													
				150	60												
				170													
				190													
				215													
50	60	50	110	110	70											10	
	80	50	130	130													
	100	50	150	150													
	120	50	170	170													
				190	84												
				215													
				240													
				265													
63	100	50	150	150	98											15	
	120	50	170	170													
	140	50	190	190													
				215													
				240													
80				150	98											15	
				170													
				190													
				215													
				240													
			265														

If your selection falls in a white Square, use Type II or Type III.

Selecting Type II Components


Type I

Continuous Preload




Type IIa

Preload Partially Relieved





Type IIb

Preload Relieved



Type III

Disengaged

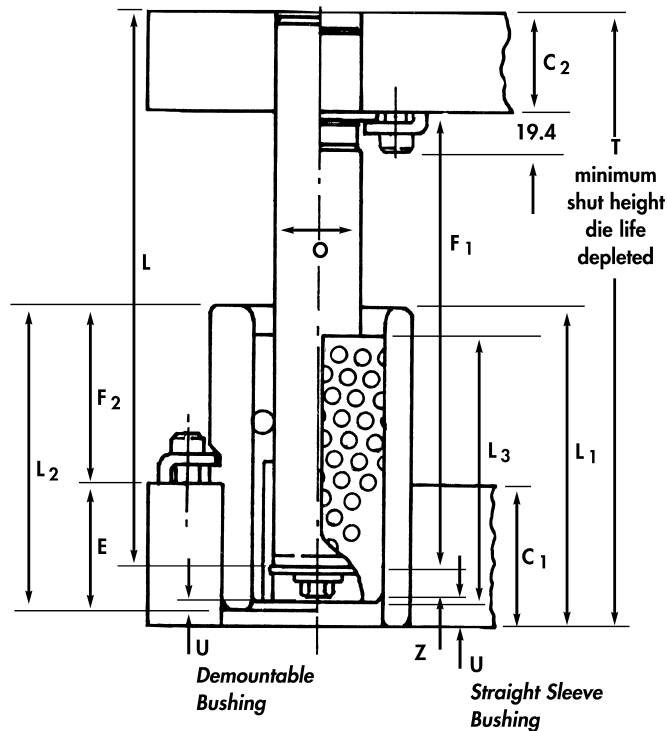

Caution: Be sure bushing does not strike punch holder (or in the case of demountable pins, the clamps retaining the pins) at minimum shut height. If this condition exists, use a shorter bushing and corresponding ball cage.

Type II Cages

Nominal Pin Diameter O	Demountable Bushing			Straight Sleeve L ₁	Ball Cage L ₃	Stroke "S" at minimum shut height (die life depleted)																		
	F ₂	E	L ₂			20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	340	360	380	
25	35	30	65	65	55																			
	50	30	80	80	70																			
	65	30	95	95	90																			
				110	100																			
				130	110																			
32	50	30	80	80	70																			
	65	30	95	95	90																			
	80	30	110	110	105																			
				130	115																			
				150	125																			
			170	135																				
40	50	30	80	80	70																			
	65	30	95	95	85																			
	80	30	110	110	105																			
	100	30	130	130	115																			
				150	125																			
				170	135																			
				190	145																			
			215	155																				
50	60	50	110	110	105																			
	80	50	130	130	120																			
	100	50	150	150	140																			
	120	50	170	170	150																			
				190	160																			
				215	170																			
				240	185																			
			265	195																				
63	100	50	150	150	145																			
	120	50	170	170	165																			
	140	50	190	190	180																			
				215	190																			
				240	205																			
				265	215																			
80				150	145																			
				170	165																			
				190	180																			
				215	190																			
				240	205																			
				265	215																			



The Innovator of Our IndustrySM

Our factories and offices:

U.S.A. • U.K. • France • Belgium • Germany • Sweden • Netherlands • Singapore

STANDARD DIE SUPPLY

Subsidiary of READY TECHNOLOGY, INC.

630 Kiser St. • Dayton, OH 45404
 (800) 367-3437 • (937) 228-8181 • FAX: (937) 228-2928
www.readytechnology.com

© 2006 READY Technology, Inc.
 CATALOG # 0206